


RECOMMENDED
PANEL CUT OUT

RoHS

IP66~68

OLD P/N:CAx-L1xxQPR
(原型號)

P/N	D
CAD	Ø1.0
CAN	Ø0.8

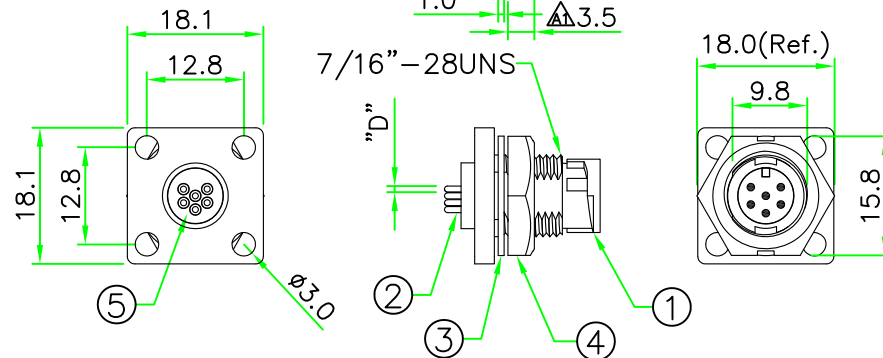

REV.	DESCRIPTION	DATE
A	ISSUE	Jan/14/2015
A1	Modify dimension	Jul/07/2015
B	Change Design	Oct/20/2015

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. MAXIMUM PANEL THICKNESS:3.2mm

3. HOW TO ORDER: CAx-L1xxQPR


02 - 2 PIN 04 - 4 PIN

03 - 3 PIN 05 - 5 PIN

06 - 6 PIN

D - CURRENT RATING 5A

N - CURRENT RATING 2A

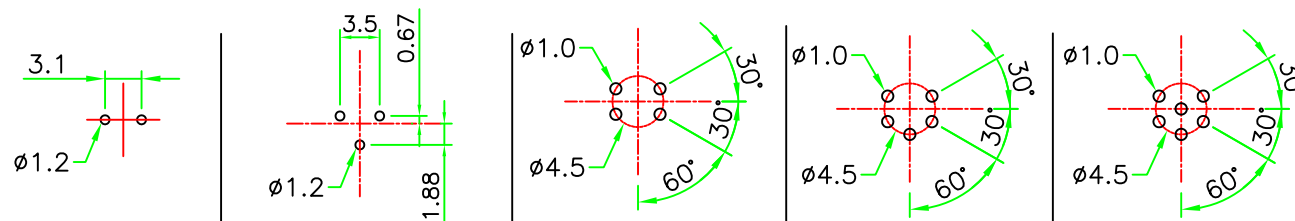

PCB LAYOUT



CAD-L102QPR



CAD-L103QPR



CAN-L104QPR



CAN-L105QPR



CAN-L106QPR

PIN ASSIGNMENT FRONT VIEW

(前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE Circular A Size Male Connector Male Pin Rear Mount Lock Type Square Flange PCB Pin	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: CAx-L1xxQPR	DR. Patty
REV. B		DWG.NO: CAx-L1xxQPR	CH. ERIC
SHEET 1/1			AP.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	A Size Male Connector Insert.NYLON+GF.	BLACK	1	