


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/05/2005
A1	Change length	Mar/05/2015



- NOTES:
- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 2A / 5A
 CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
 - HOW TO ORDER: CA_x-L2_{xx}SN
 02 - 2 PIN 04 - 4 PIN
 03 - 3 PIN 05 - 5 PIN
 06 - 6 PIN
 D - CURRENT RATING 5A
 N - CURRENT RATING 2A

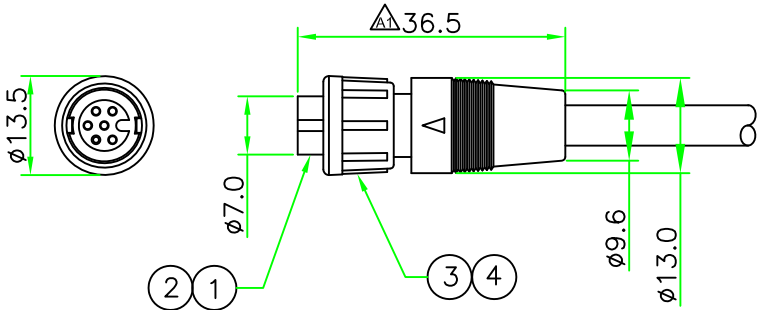

PIN ASSIGNMENT FRONT VIEW
(前視圖)

4	LOCK NUT	NYLON+GF	BLACK	1	
3	O-RING	Silicon.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated .Female Contact.		N	
1	CONNECTOR	A Size Female Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : Circular A Size Female Connector Lock Type Molded Cable	
SCALE	1 : 1		
UNLESS OTHERWISE SPECIPED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX± 0.05 ANGLE ± 1°		P/N: CA _x -L2 _{xx} SN	DR. Patty
REV.	SHEET		CH. ERIC
A1	1/1	DWG.NO: CA _x -L2 _{xx} SN	AP.