


RoHS

IP66~68

| REV. | DESCRIPTION | DATE        |
|------|-------------|-------------|
| A    | ISSUE       | May/19/2015 |
|      |             |             |
|      |             |             |

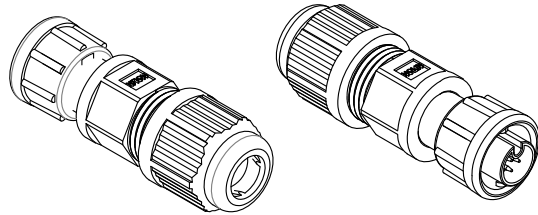

## NOTES:

## 1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

## 2. HOW TO ORDER: CAX-L4xxSA





02 - 2 PINS 05 - 5 PINS

03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

D - CURRENT RATING 5A

N - CURRENT RATING 2A

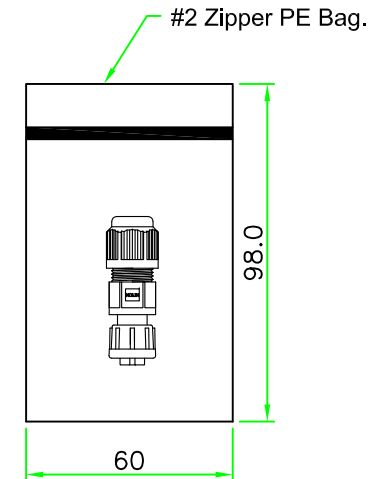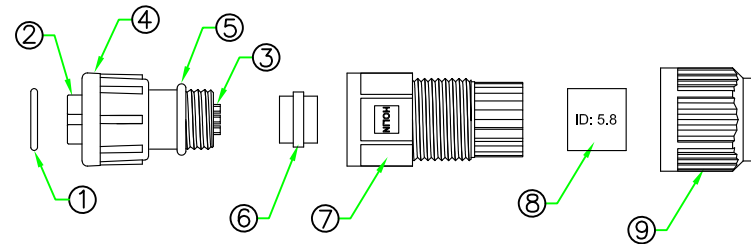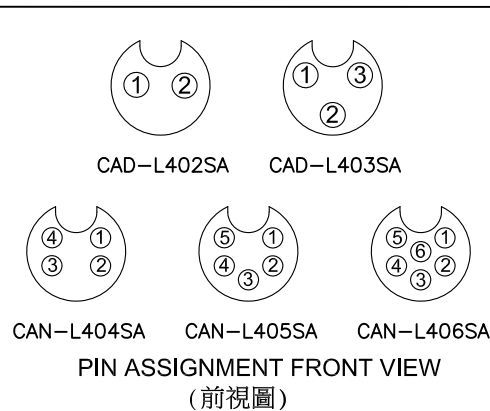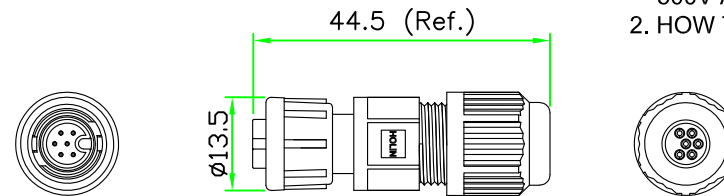

|     |           |                                           |       |      |         |
|-----|-----------|-------------------------------------------|-------|------|---------|
| 9   | CLAMP NUT | NYLON+GF                                  | BLACK | 1    |         |
| 8   | TUBE      | EPDM. ( ID=5.8mm.)                        | BLACK | 1    |         |
| 7   | HOOD      | NYLON.                                    | BLACK | 1    |         |
| 6   | GASKET    | EPDM.                                     | BLACK | 1    |         |
| 5   | O-RING    | Silcon.                                   | BLACK | 1    |         |
| 4   | LOCK NUT  | NYLON+GF                                  | BLACK | 1    |         |
| 3   | CONTACT   | BRASS ,Male Pin. 6u" Gold Plated.         |       | N    |         |
| 2   | CONNECTOR | A Size Female Connector Insert, NYLON+GF. | BLACK | 1    |         |
| 1   | O-RING    | Silcon.                                   | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                               | COLOR | Q'TY | REMARKS |

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

|                                                                                            |           |                                                                                  |          |
|--------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------|----------|
| UNIT: mm                                                                                   | TITLE :   | Circular A Size Lock Type<br>Female Connector Male Pin<br>Field Installable Plug |          |
| SCALE                                                                                      | 1:1       |                                                                                  |          |
| UNLESS OTHERWISE<br>SPECIFIED TOLERANCES:<br>.X ± 0.25 .XX ± 0.1<br>.XXX ± 0.05 ANGLE ± 1° |           | P/N:<br>CAX-L4xxSA                                                               | DR. JACK |
| REV. A                                                                                     | SHEET 1/1 |                                                                                  | CH. ERIC |
|                                                                                            |           | DWG.NO:<br>CAX-L4xxSA                                                            | AP.      |