
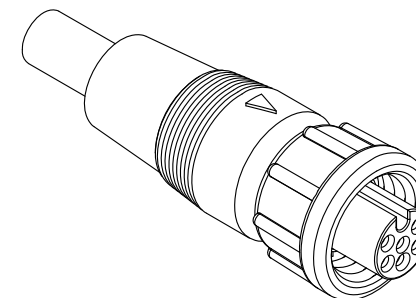
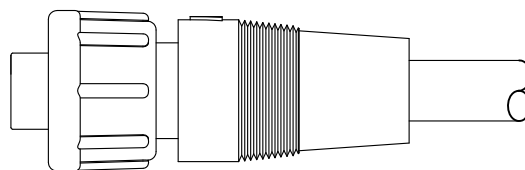



RoHS

IP66~68

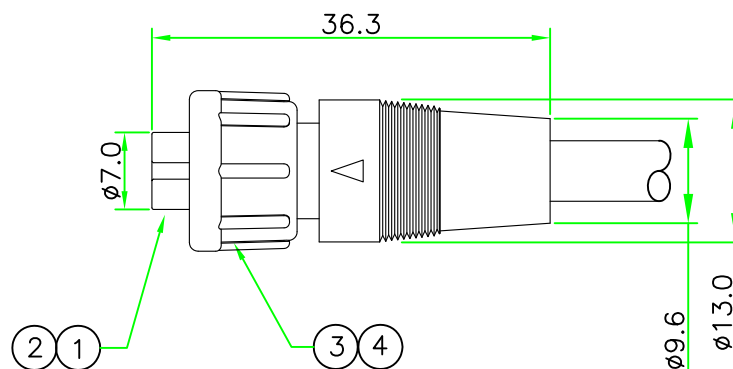

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CAx-P2xxSN


02 - 2 PIN 04 - 4 PIN

03 - 3 PIN 05 - 5 PIN


06 - 6 PIN

D - CURRENT RATING 5A


N - CURRENT RATING 2A




CAD-P202SN




CAD-P203SN



CAN-P204SN



CAN-P205SN



CAN-P206SN

PIN ASSIGNMENT FRONT VIEW

(前視圖)

4	SCREW NUT	NYLON+GF	BLACK	1	
3	O-RING	Silicon.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated .Female Contact.		N	
1	CONNECTOR	A Size Female Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular A Size Female Connector Screw Type Molded Cable		
SCALE		1 : 1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:			P/N:		DR. Patty
.X ± 0.25 .XX ± 0.1			CAx-P2xxSN		CH. ERIC
.XXX ± 0.05 ANGLE ± 1°					
REV.	SHEET	DWG.NO:	AP.		
A1	1/1	CAx-P2xxSN			