


RoHS

IP67

| REV. | DESCRIPTION          | DATE        |
|------|----------------------|-------------|
| A    | ISSUE                | Dec/25/2009 |
| A1   | REMARKS NOTES CANCEL | Apr/22/2014 |
|      |                      |             |

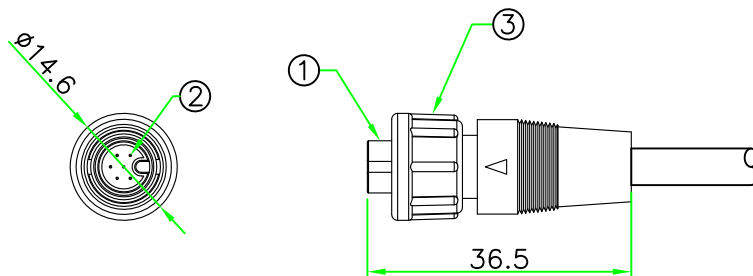

## NOTES:

## 1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CA<sub>x</sub>-P4<sub>xx</sub>SN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN


04 - 4 PIN

D - CURRENT RATING 5A


N - CURRENT RATING 2A




CAD-P402SN




CAD-P403SN



CAN-P404SN



CAN-P405SN



CAN-P406SN

Pin Assignment Front View



|     |           |                                    |       |      |         |
|-----|-----------|------------------------------------|-------|------|---------|
| 3   | SCREW NUT | Nylon+GF.                          | BLACK | 1    |         |
| 2   | CONTACT   | BRASS, Male Pin, 6u" Gold Plated.  |       | N    |         |
| 1   | CONNECTOR | CAN FM Connector Insert. Nylon+GF. | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                        | COLOR | Q'TY | REMARKS |

**HOLIN<sup>®</sup>** HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

|                                                                                   |          |         |                                                                                        |
|-----------------------------------------------------------------------------------|----------|---------|----------------------------------------------------------------------------------------|
|                                                                                   | UNIT: mm | TITLE : | Circular A Size Screw Type<br>Female Connector Male Pin<br>Straight Angle molded cable |
| SCALE                                                                             | 1:1      | P/N:    | CA <sub>x</sub> -P4 <sub>xx</sub> SN                                                   |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:<br>x ±0.25 xx ±0.1<br>xxx ±0.05 ANGLE ±1°X |          | DWG.NO: | CA <sub>x</sub> -P4 <sub>xx</sub> SN                                                   |
| REV.                                                                              | SHEET    |         |                                                                                        |
| A1                                                                                | 1/1      |         |                                                                                        |

DR. Patty

CH. ERIC

AP.