
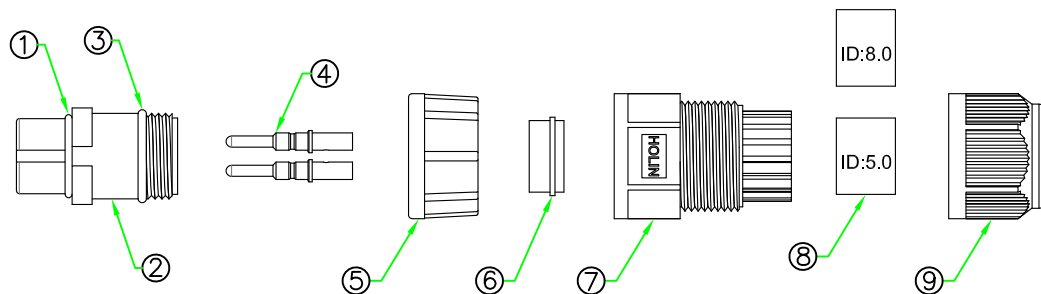
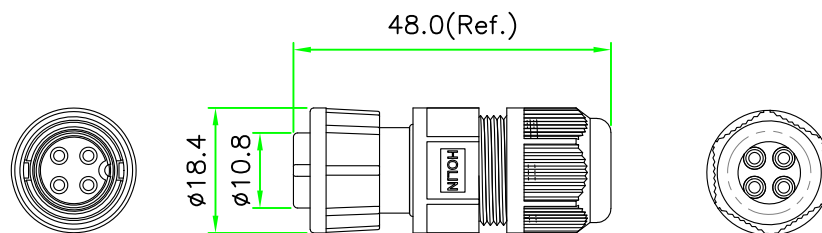


RoHS



CBP-L402SAC CBP-L403SAC CBP-L404SAC
PIN ASSIGNMENT FRONT VIEW
(前視圖)

9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	SILICON.	BLACK	1	
5	LOCKING NUT	NYLON+GF	BLACK	1	
4	CONTACT	BRASS ,Male Pin. 6u"Gold Plated.		N	
3	O-RING	EPDM.	BLACK	1	
2	CONNECTOR	B Size Female/Male Connector Insert, NYLON+GF.		1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/28/2021

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBP-L4xxSAC

02 - 2 PIN

03 - 3 PIN

04 - 4 PIN

P - CURRENT RATING 10A

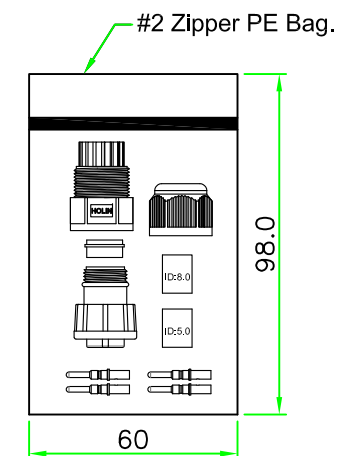

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±1.0 XX ±0.5 XXX ±0.25 ANGLE ± 1°	UNIT: mm	TITLE : Circular B Size Lock Type Female Connector Male Pin Field Installable Plug with Crimp Pin	P/N: CBP-L4xxSAC	DR. James
	SCALE 1:1			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: CBP-L4xxSAC		AP.