
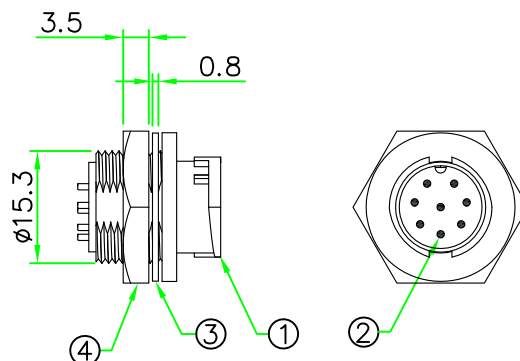
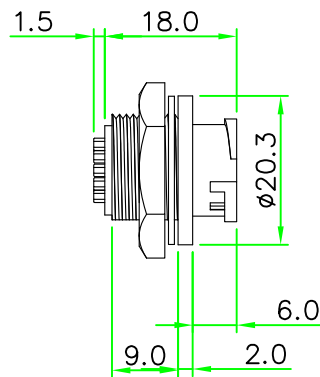




RECOMMENDED
PANEL CUT OUT

RoHS
IP66~68



REV.	DESCRIPTION	DATE
A	ISSUE	Jul/15/2014

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBx-L1xxCSF

02 - 2 PIN 07 - 7 PIN
03 - 3 PIN 08 - 8 PIN
04 - 4 PIN 10 - 10 PIN
05 - 5 PIN 12 - 12 PIN
06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

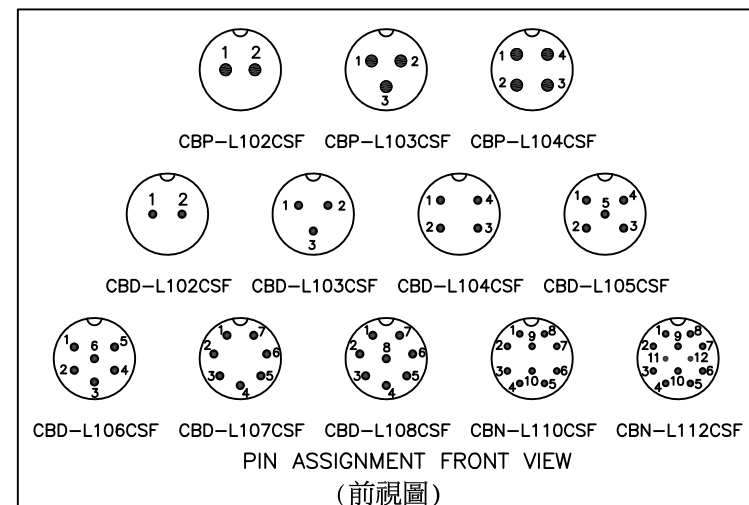

PIN ASSIGNMENT FRONT VIEW

(前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular B Size Male Connector Male Pin Lock Type Round Flange Front Panel Mount Solder Bucket Pin	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		P/N: CBx-L1xxCSF	DR. Patty
REV. A	SHEET 1/1		CH. ERIC
		DWG.NO: CBx-L1xxCSF	AP.

4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	B Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS