



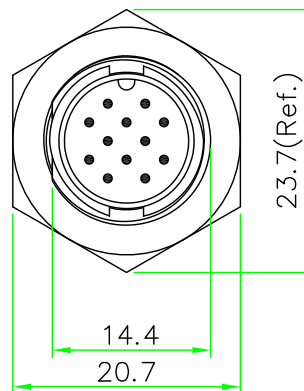


RECOMMENDED
PANEL CUT OUT

RoHS
IP66~68

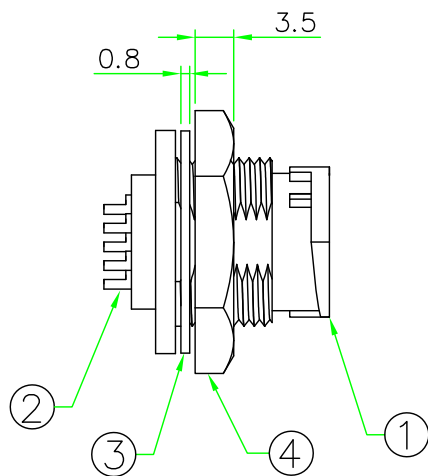

P/N	L
CBP	6.6
CBD	1.6
CBN	2.5

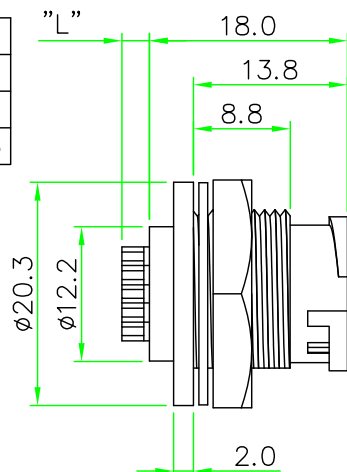

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/25/2014
A1	Modify Contact length	Jun/29/2015

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L1xxCSR

02 - 2 PIN 07 - 7 PIN
03 - 3 PIN 08 - 8 PIN
04 - 4 PIN 10 - 10 PIN
05 - 5 PIN 12 - 12 PIN
06 - 6 PIN

P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

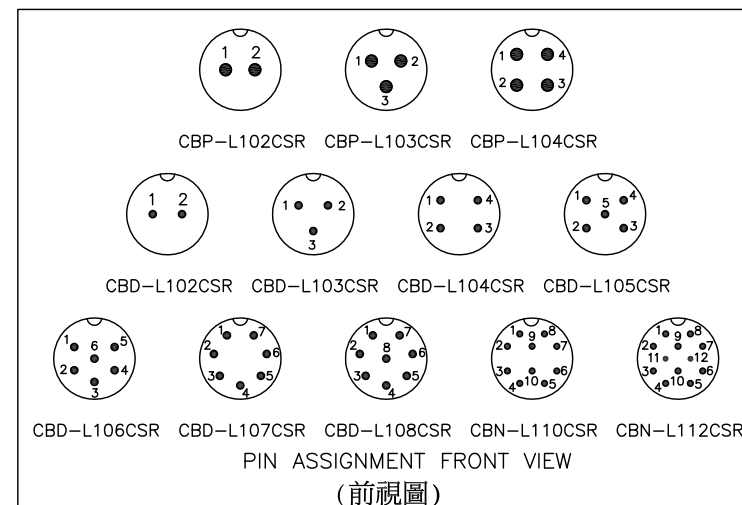

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular B Size Male Connector Male Pin Rear Mount Lock Type Round Flange Solder Bucket Pin
SCALE	1.5:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°	P/N: CBx-L1xxCSR	DR. Patty
REV. A1	SHEET 1/1	CH. ERIC
	DWG.NO: CBx-L1xxCSR	AP.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	B Size Male Connector Insert.NYLON+GF.	BLACK	1	