
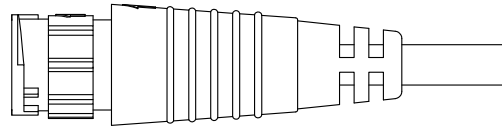

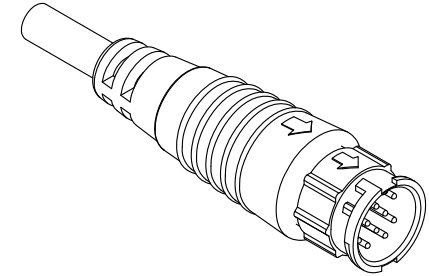


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/26/2014

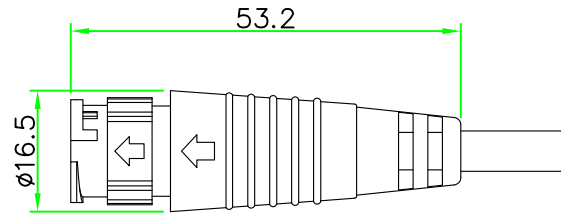

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A \ 5A \ 10A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L1xxSM

02 - 2 PIN 07 - 7 PIN
03 - 3 PIN 08 - 8 PIN
04 - 4 PIN 10 - 10 PIN
05 - 5 PIN 12 - 12 PIN
06 - 6 PIN


P - CURRENT RATING 10A

D - CURRENT RATING 5A


N - CURRENT RATING 2A



CBP-L102SM CBP-L103SM CBP-L104SM



CBD-L102SM CBD-L103SM CBD-L104SM CBD-L105SM



CBD-L106SM CBD-L107SM CBD-L108SM CBN-L110SM CBN-L112SM

PIN ASSIGNMENT FRONT VIEW

(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular B Size Lock Type Male Connector Male Pin Molded Cable		
SCALE	1:1	P/N: CBx-L1xxSM			DR. Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		DWG.NO: CBx-L1xxSM			CH. ERIC
REV.	A	SHEET	1/1	AP.	