



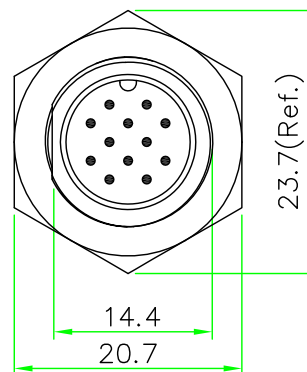


RECOMMENDED
PANEL CUT OUT

RoHS
IP66~68

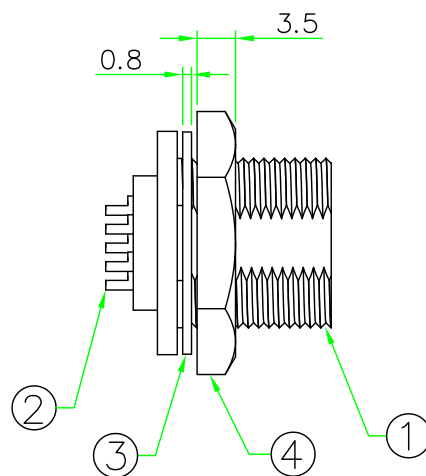

P/N	L
CBP	6.6
CBD	1.6
CBN	2.5

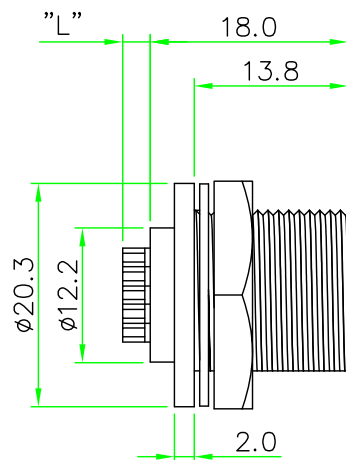


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/02/2014
A1	Modify Contact length	Jun/25/2015

NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A / 10A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 4.5mm
- HOW TO ORDER: CBx-P1xxCSR

02 - 2 PIN 07 - 7 PIN
03 - 3 PIN 08 - 8 PIN
04 - 4 PIN 10 - 10 PIN
05 - 5 PIN 12 - 12 PIN
06 - 6 PIN

P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

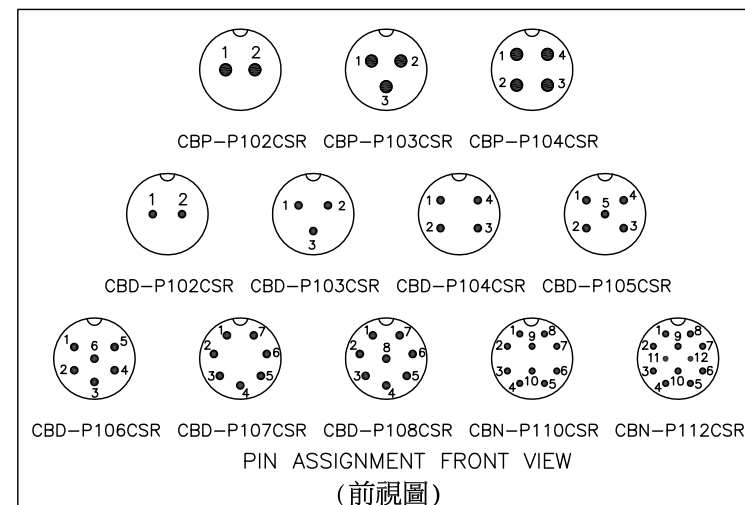

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular B Size Male Connector Male Pin Rear Mount Screw Type Round Flange Solder Bucket Pin	
SCALE	1.5:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX± 0.05 ANGLE ± 1°		P/N: CBx-P1xxCSR	DR. Patty
			CH. ERIC
REV. A1	SHEET 1/1	DWG.NO: CBx-P1xxCSR	AP.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	B Size Male Connector Insert.NYLON+GF.	BLACK	1	