
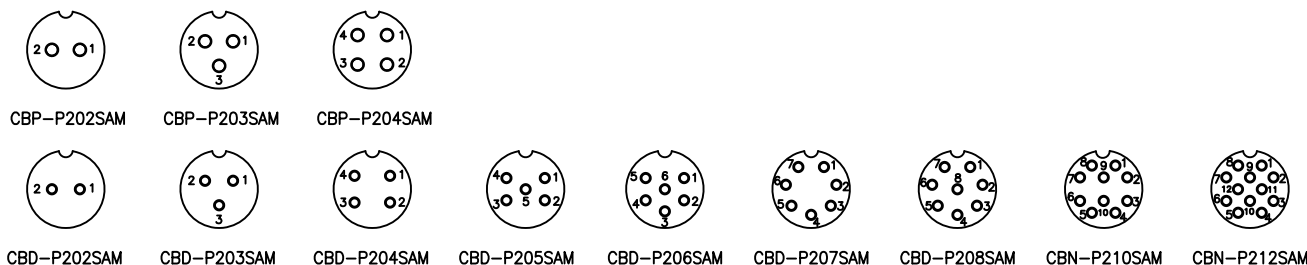
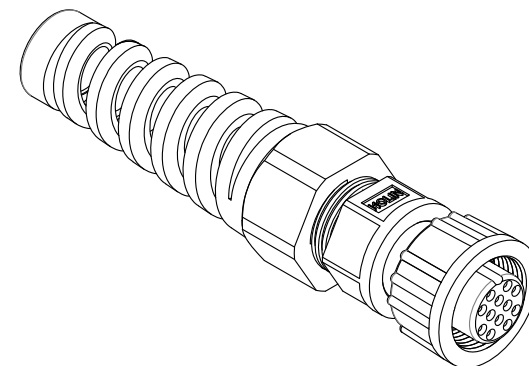
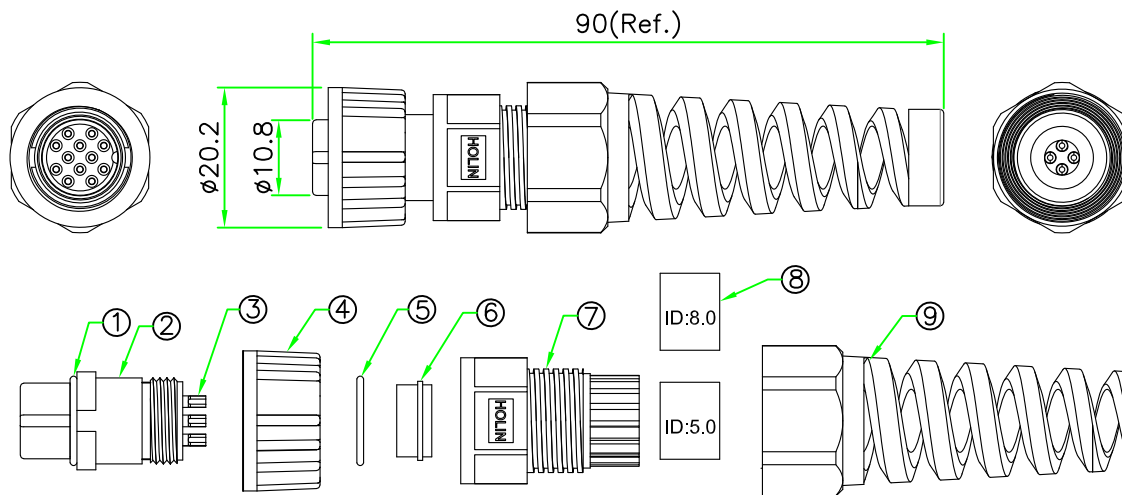


RoHS

#2 Zipper PE Bag.

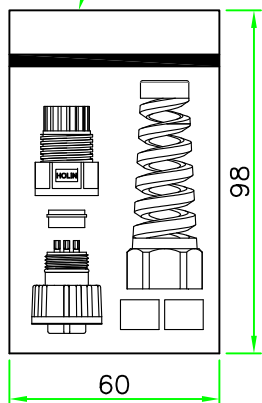

PIN ASSIGNMENT FRONT VIEW (前視圖)

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A /10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-P2xxSAM

02 - 2 PIN 07 - 7 PIN

03 - 3 PIN 08 - 8 PIN

04 - 4 PIN 10 - 10 PIN

05 - 5 PIN 12 - 12 PIN

06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

9	CLAMP NUT	NYLON.	BLACK	1	
8	TUBE	EPDM. (ID= 5.0 & 8.0mm.)	BLACK	2	
7	HOOD	NYLON.	BLACK	1	
6	GASKET	SILICON.	BLACK	1	
5	O-RING	EPDM.	BLACK	1	
4	SCREW NUT	NYLON+GF.	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u"Gold Plated.		N	
2	CONNECTOR	B Size Female Connector Insert, NYLON+GF.		1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular B Size Screw Type Female Connector Female Pin With S/R Field Installable Plug
SCALE	1:1	P/N:	CBx-P2xxSAM
UNLESS OTHERWISE SPECIFIED TOLERANCES: xx. ±1.0 .x ±1.0 .xx ±0.5 .xxx ±0.25 ANGLE ± 1°	REV. A	DWG.NO:	CBx-P2xxSAM
	SHEET 1/1	DR. James	CH. Eric
		AP.	