



RoHS

IP66-68

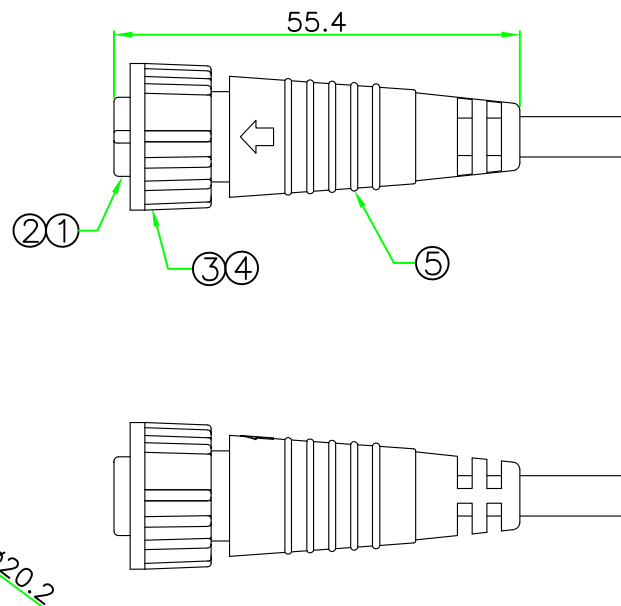

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/27/2014

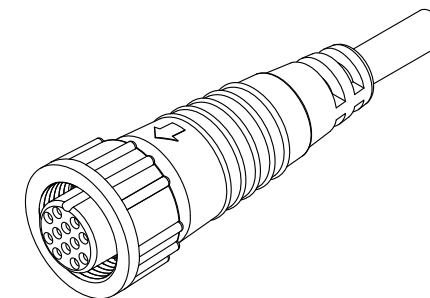

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-P2xxSM

02 - 2 PIN 07 - 7 PIN

03 - 3 PIN 08 - 8 PIN

04 - 4 PIN 10 - 10 PIN


05 - 5 PIN 12 - 12 PIN

06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

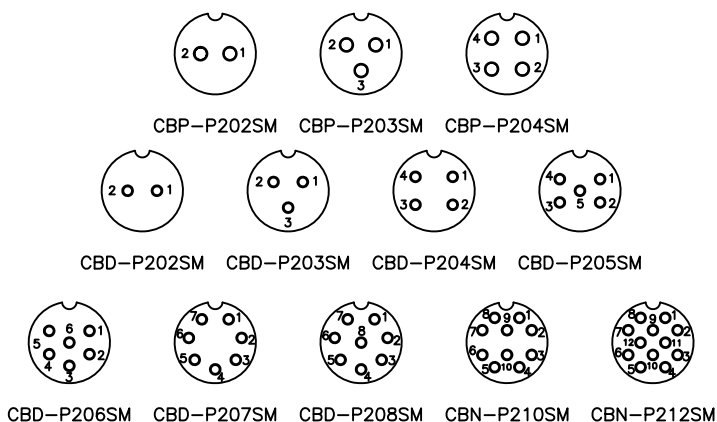

PIN ASSIGNMENT FRONT VIEW

(前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	LOCK NUT	NYLON+GF	BLACK	1	
3	O-RING	NBR.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : Circular B Size Screw Type Female Connector Female Pin Molded Cable			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: CBx-P2xxSM	DR. Patty		
.X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°			CH. ERIC		
REV.	SHEET	DWG.NO: CBx-P2xxSM	AP.		
A	1/1				