
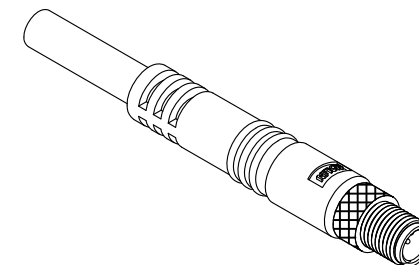


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/16/2014

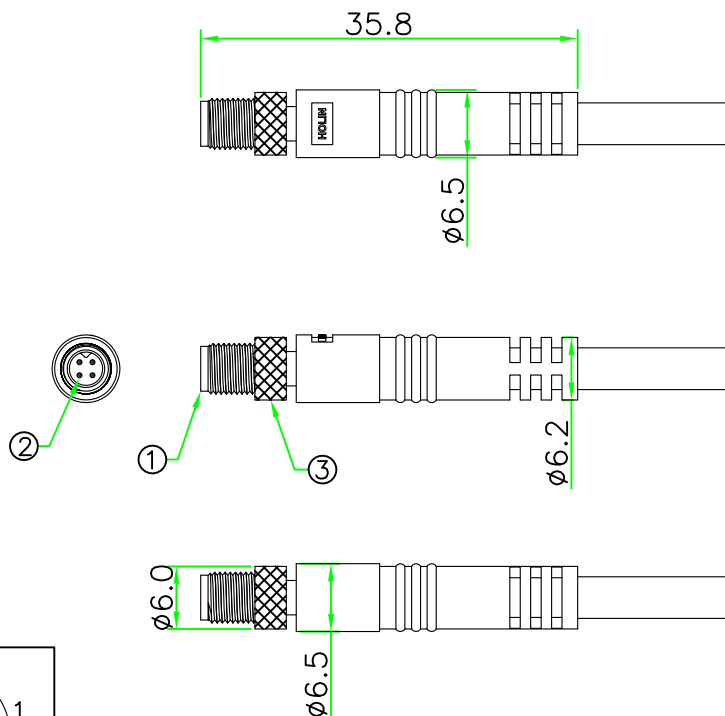

NOTES:


1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1 A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

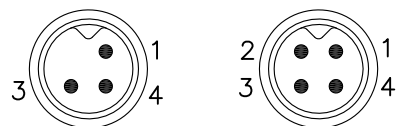

A05I-M103SM

A05I-M104SM

PIN ASSIGNMENT FRONT VIEW
(前視圖)

*Cable specification and length can be customized.

4	RING NUT	BRASS, Nickel Plated.		1	
3	O-RING	VITON.	BLACK	1	
2	CONTACT	BRASS , Male pin ,6 u" Gold plated .		N	
1	CONNECTOR	M05 A-Coding Male Connector Insert.Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT:mm	TITLE M5 A-Coding Male molded cable Ass'y		
SCALE		1.5:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX± 0.05 ANGLE ± 1°			P/N: A05I-M1xxSM		DR. Patty
					CH. ERIC
			REV.	A	SHEET 1/1