

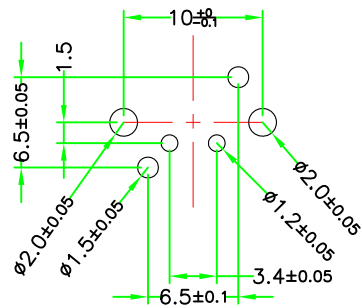
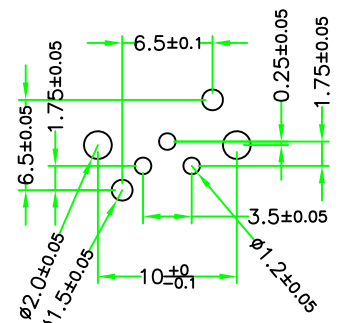


RoHS IP66~68

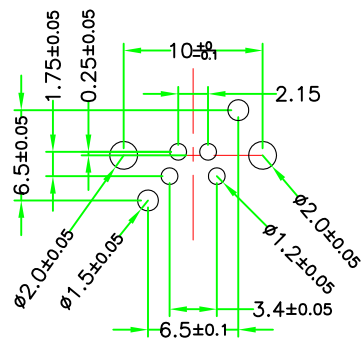


PCB Layout


A08D-M204HPRR









A08D-M203HPRR



A08D-M202HPRR



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

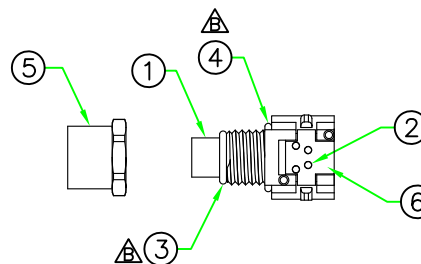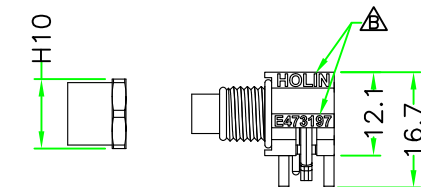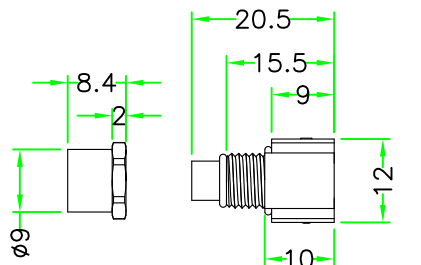

△ LABEL of contents :



E473197

A08D-M2xxHPRR

Rating : 60 V AC/DC , 3 A

CAUTION:

NOT FOR INTERRUPTING CURRENT

ATTENTION:

NE PAS UTILISER POUR COUPER LE COURANT

7	GLUE	EPOXY.	BLACK	1	
6	PIN STAND	NYLON+GF.	BLACK	1	
5	RING NUT	BRASS. Nickel Plated.		1	
4	O-RING	SILICON. △	B.BLUE	1	
3	O-RING	SILICON. △	B.BLUE	1	
2	CONTACT	BRASS, Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	M8 A-Coding Female R/A Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : M8 A-Coding 2~4 Pin Female R/A PCB Mount Connector	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.5 XX ±0.25 XXX ±0.1 ANGLE ±1°X		P/N: A08D-M2xxHPRR	DR. JACK
REV. B	SHEET 1/1		CH. ERIC
		DWG.NO: A08D-M2xxHPRR	AP.