PROPRIETARY AND CONFIDENTIAL:THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HTP ASIA TECHNOLOGY CO., LTD. . ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HTP ASIA TECHNOLOGY CO., LTD. IS PROHIBITED.

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add 7~8 Pin & correct Pin Assignment.	Oct/16/2018
B	Remove 5~8 Pin.	Oct/07/2023

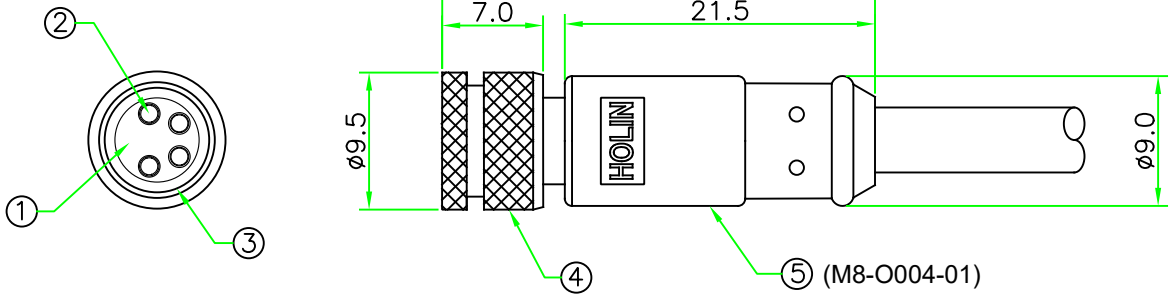

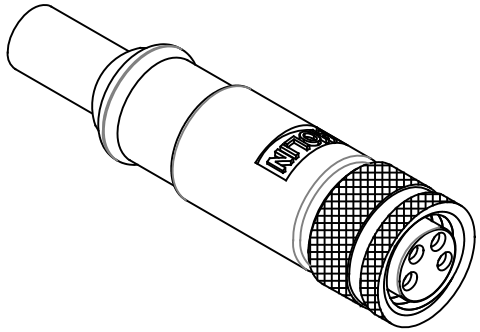

NOTES: A1

1. ELECTRICAL CHARACTERISTICS:
   CURRENT RATING: 3A
   TEMPERATURE RANGE: -25°C TO +85°C
   DIELECTRIC WITHSTANDING VOLTAGE:
   500V AC FOR ONE MINUTE
2. HOW TO ORDER: A08D-M2xxSN B
   - 02 - 2 PINS
   - 03 - 3 PINS
   - 04 - 4 PINS

※Cable specification and length can be customized.



A08D-M202SN A08D-M203SN A08D-M204SN

PIN ASSIGNMENT FRONT VIEW（前視圖）A1 B

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	OVERMOLD	PVC or PU.	BLACK	1	
4	RING NUT	BRASS, Nickel Plated with Ratchet Mechanism.		1	
3	O-RING	Viton	BLACK	1	
2	CONTACT	Brass , 6 u" gold plated. Female contact.		N	
1	CONNECTOR	M8 A Coding Female Connector insert. Nylon+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : M8 A Coding Female Connector Molded Cable Ass'y	
SCALE	2:1		
UNLESS OTHERWISE SPECIPED TOLERANCES: xx. ± 1.0 .x ± 1.0 .xx ± 0.5 .xxx ± 0.25 ANGLE ± 1°		P/N: A08D-M2xxSN	DR. James
			CH. Eric
REV. B	SHEET 1/1	DWG.NO: A08D-M2xxSN	AP.

-版權所有.翻版必究-