



RoHS IP66~68

| REV. | DESCRIPTION                       | DATE        |
|------|-----------------------------------|-------------|
| A    | ISSUE                             | Jun/09/2014 |
| B    | Change material and add UL label. | Jan/27/2015 |
|      |                                   |             |

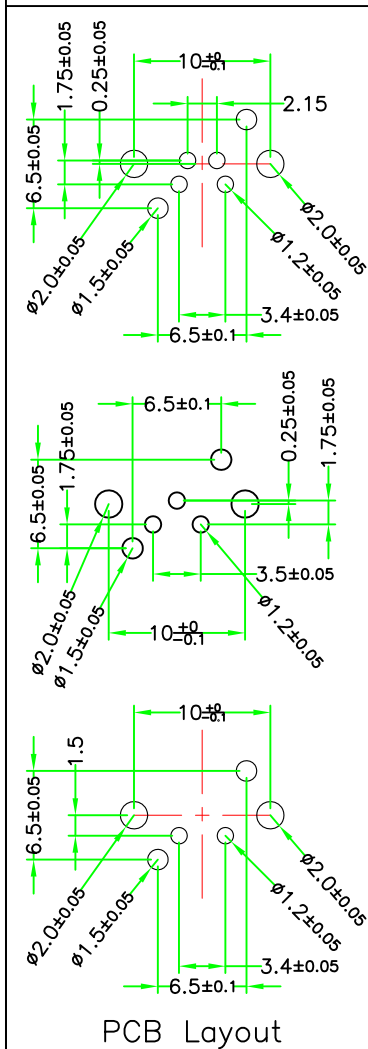


A08D-P104HPRR




PIN ASSIGNMENT  
FRONT VIEW  
(前視圖)

A08D-P103HPRR




PIN ASSIGNMENT  
FRONT VIEW  
(前視圖)

A08D-P102HPRR





PIN ASSIGNMENT  
FRONT VIEW  
(前視圖)






③



④



M8\*1.0



△ LABEL of contents :

E473197  
A08D-P1xxHPRR  
Rating : 60 V AC/DC , 3 A  
CAUTION:  
NOT FOR INTERRUPTING CURRENT  
ATTENTION:  
NE PAS UTILISER POUR COUPER LE COURANT

|     |           |                                                  |        |      |         |
|-----|-----------|--------------------------------------------------|--------|------|---------|
| 6   | GLUE      | EPOXY.                                           | BLACK  | 1    |         |
| 5   | PIN STAND | NYLON+GF.                                        | BLACK  | 1    |         |
| 4   | HEX NUT   | BRASS. Nickel Plated.                            |        | 1    |         |
| 3   | O-RING    | SILICON. △                                       | B.BLUE | 1    |         |
| 2   | CONTACT   | BRASS, Male Pin. 6u" Gold Plated.                |        | N    |         |
| 1   | CONNECTOR | M8 A-Coding Male R/A Connector Insert. Nylon+GF. | BLACK  | 1    |         |
| No. | PART NAME | DESCRIPTION                                      | COLOR  | Q'TY | REMARKS |

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

|                                                                                       |         |                                                     |
|---------------------------------------------------------------------------------------|---------|-----------------------------------------------------|
| UNIT: mm                                                                              | TITLE : | M8 A-Coding 2~4 Pin Male<br>R/A PCB Mount Connector |
| SCALE                                                                                 | 1:1     |                                                     |
| UNLESS OTHERWISE<br>SPECIFIED TOLERANCES:<br>X ±0.25 XX ±0.1<br>XXX ±0.05 ANGLE ± 1°X | P/N:    | A08D-P1xxHPRR                                       |
| REV.                                                                                  | SHEET   | DWG.NO:                                             |
| B                                                                                     | 1/1     | A08D-P1xxHPRR                                       |
|                                                                                       |         | DR. JACK<br>CH. ERIC<br>AP.                         |