


IP66-68

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add 7~8 Pin & correct Pin Assignment.	Oct/16/2018

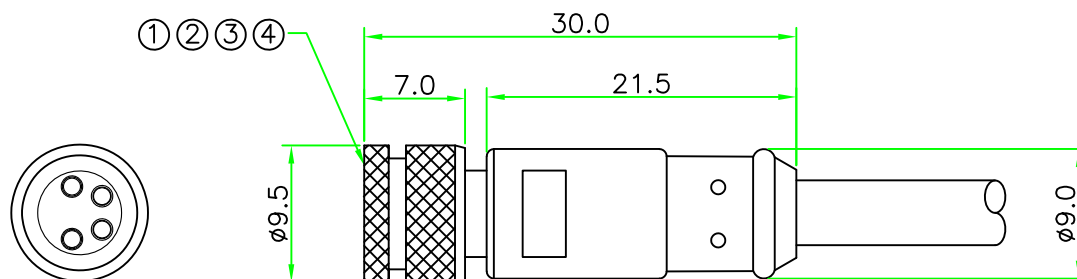

NOTES:



1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-M2xxSN

02 - 2 PINS

03 - 3 PINS

04 - 4 PINS

05 - 5 PINS

06 - 6 PINS

07 - 7 PINS

08 - 8 PINS


I - CURRENT RATING 1.5A

D - CURRENT RATING 3A


*Cable specification and length can be customized.




A08D-M202SN




A08D-M203SN




A08D-M204SN




A08I-M205SN



A08I-M206SN



A08I-M207SN



A08I-M208SN

PIN ASSIGNMENT FRONT VIEW (前視圖)

4	Ring Nut	Brass, nickel plated with ratchet mechanism, without sleeve		1	
3	O-Ring	Viton	BLACK	1	
2	Contact	Brass, 6 u" gold plated. Female contact.		N	
1	Connector	M8 A Coding Female connector insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M8 A Code
SCALE	2:1		Female molded cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	A08x-M2xxSN
.X ± 0.5 .XX ± 0.25			DR. SIBYL
.XXX ± 0.1 ANGLE ± 1°			CH. ERIC
REV.	SHEET	DWG.NO:	AP.
A1	1/1	A08x-M2xxSN	