



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/19/2024

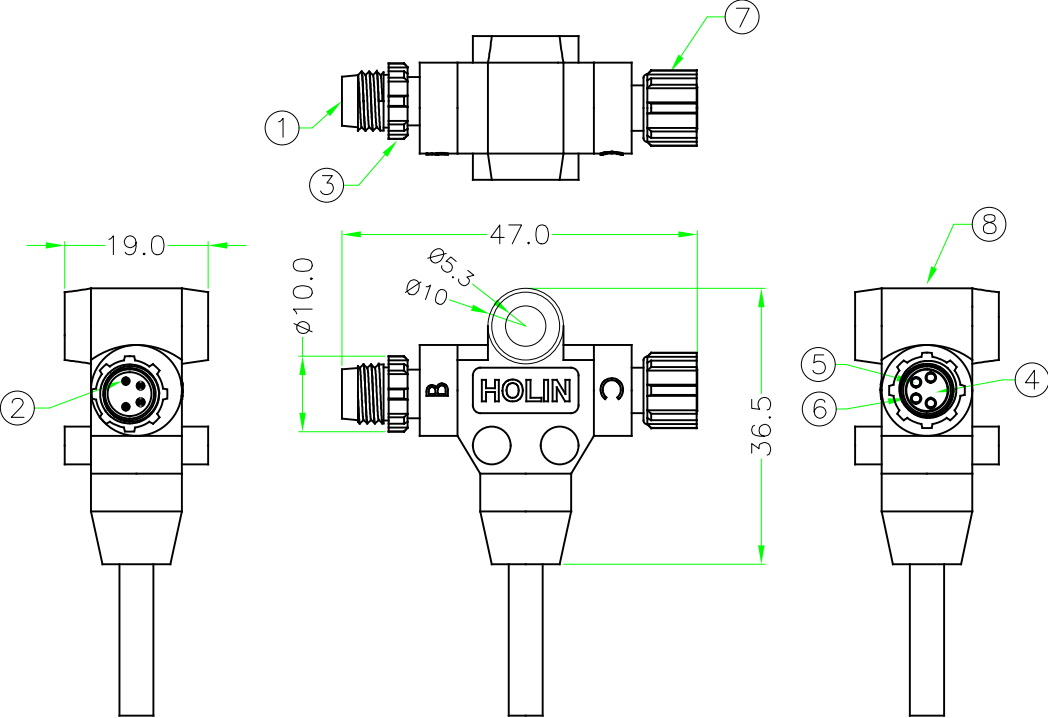


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING: 30V D.C or A.C
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: A08T-PCMF0xx

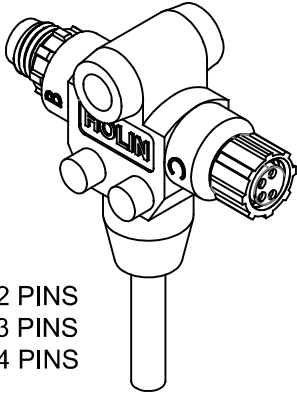

22 - 2 PINS
33 - 3 PINS
44 - 4 PINS

CONNECTOR GENDER

B M08A-xM			C M08A-xF		
1	2	4	2	1	4
M08A-2M	M08A-3M	M08A-4M	M08A-2F	M08A-3F	M08A-4F

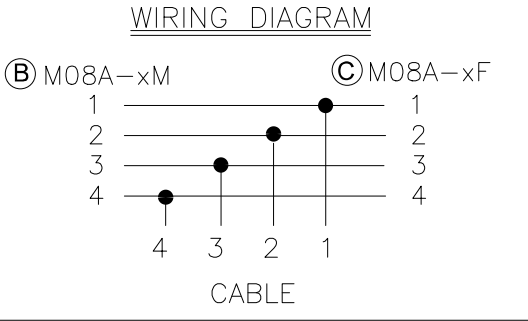

PIN ASSIGNMENT FRONT VIEW (前視圖)

※ Cable specification and length can be customized.

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Nylon+GF.	BLACK	1	
6	O-RING	Viton.	BLACK	1	
5	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		N	
4	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M8 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.		禾凌科技股份有限公司	
UNIT: mm	SCALE	TITLE : M8 A-Coding All Plastic T-Adaptor	
UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N:	A08T-PCMF0xx	DR. SIBYL
XX. ±1.0			CH. JAMES
.X ±1.0 .XX ±0.5			AP.
.XXX ±0.25 ANGLE ± 1°			
REV. A	SHEET 1/1	DWG.NO: A08T-PCMF0xx	