



RoHS

2~4 PIN
(模號 13-135)

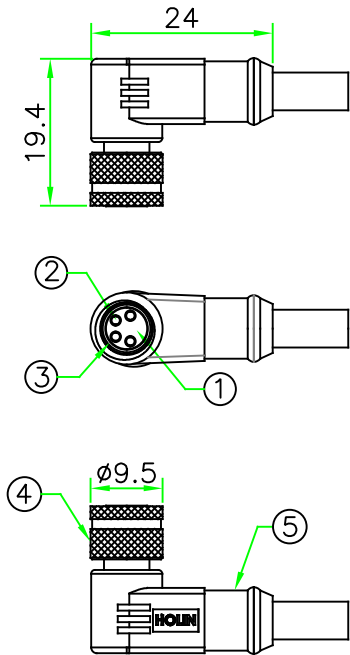

5~8 PIN
(模號 42-135)

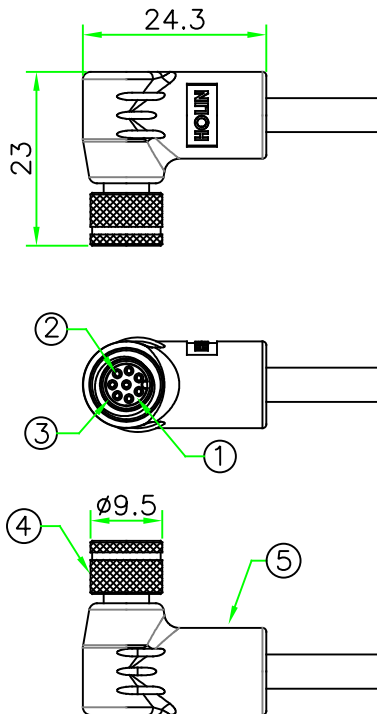


REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add Item	Apr/30/2015
A2	Add 7~8 Pin & Correct Pin Assignment.	Oct/25/2018
NOTE1	Change 5~8 Pin overmold.	Feb/25/2025

NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1.5A / 3A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-M2xxRN

02 - 2 PINS 06 - 6 PINS
03 - 3 PINS 07 - 7 PINS
04 - 4 PINS 08 - 8 PINS
05 - 5 PINS
I - CURRENT RATING 1.5A
D - CURRENT RATING 3A

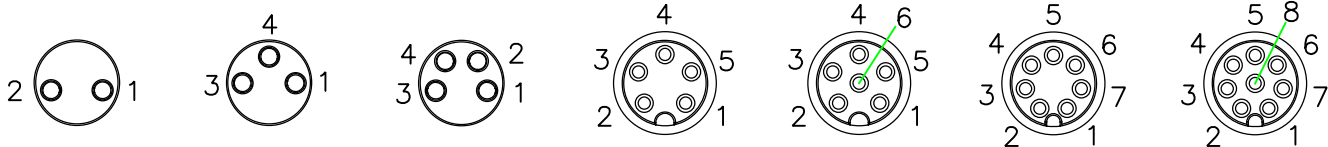

A08D-M202RN A08D-M203RN A08D-M204RN A08I-M205RN A08I-M206RN A08I-M207RN A08I-M208RN

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	RING NUT	Brass, Nickel Plated .		1	
3	O-RING	Viton.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M8 A Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

*Cable specification and length can be customized.

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M8 A-Coding Female R/A Molded Cable
SCALE	1:1	P/N:	A08x-M2xxRN
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°	REV.	DWG.NO:	A08x-M2xxRN
A2	SHEET 1/1	DR.	SIBYL
		CH.	JAMES
		AP.	