
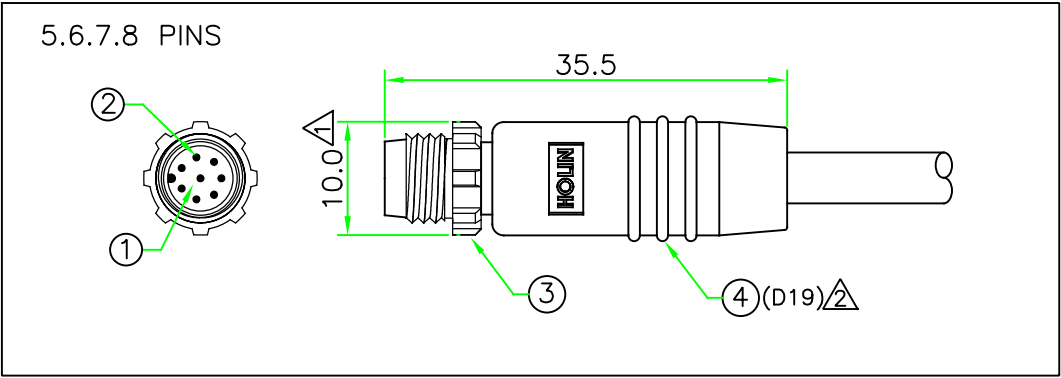


RoHS

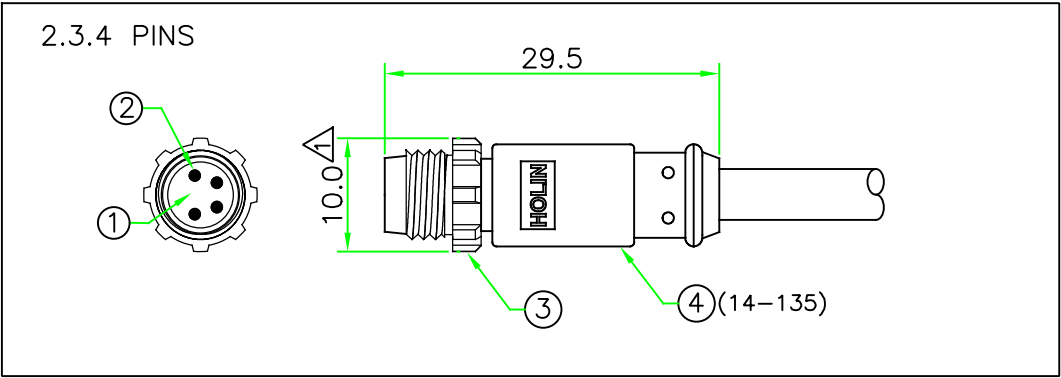

REV.	DESCRIPTION	DATE
A	ISSUE	May/04/2015
A1	Add 7~8Pin & Correct Pin Assignment.	Oct/26/2018
NOTE1	Correct dimension.	Sep/19/2024
NOTE2	Change 5~8Pin overmold.	Feb/26/2025

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1.5A / 3A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A08x-P1xxSN △1
- 02 - 2 PINS

03 - 3 PINS

04 - 4 PINS


05 - 5 PINS

06 - 6 PINS

07 - 7 PINS

08 - 8 PINS
- I - CURRENT RATING 1.5A
D - CURRENT RATING 3A

※Cable specification and length can be customized.

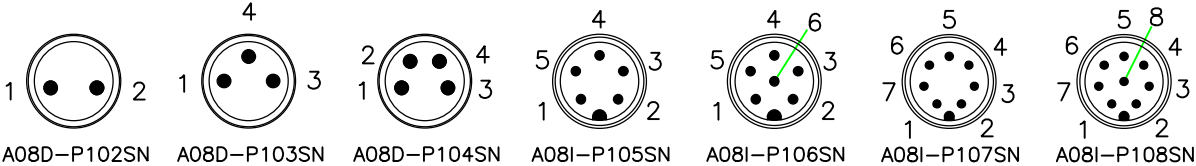

PIN ASSIGNMENT FRONT VIEW (前視圖) △1

4	OVERMOLD △2	PVC or PU.	BLACK	1	
3	RING NUT	Nylon + GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold plated .Male Contact.		N	
1	CONNECTOR	M8 A-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M8 A-Coding Male
SCALE	2:1		All Pastic Molded Cable Ass'y
UNLESS OTHERWISE SPECIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N:	A08x-P1xxSN
REV.	SHEET	DWG.NO:	A08x-P1xxSN
A1	1/1		

DR. SIBYL

CH. JAMES

AP.