
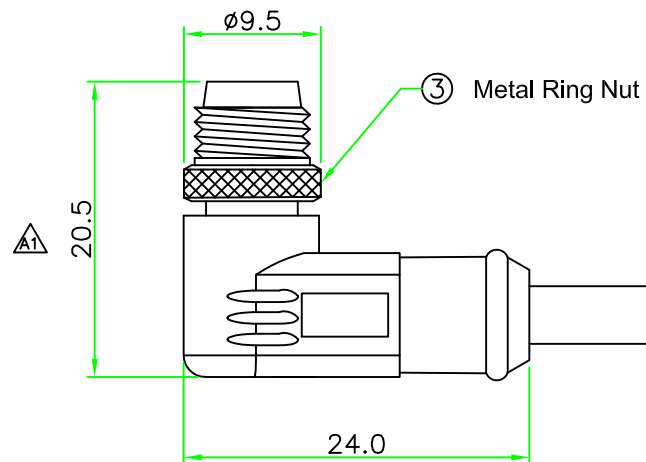


IP66-68

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/04/2014
A1	Correct Dimension & Note.	Oct/29/2018

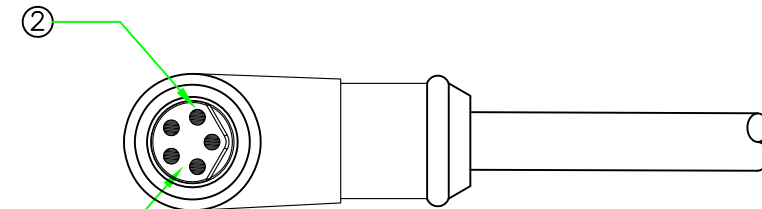

NOTES:


1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 3A Δ

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE



PIN ASSIGNMENT FRONT VIEW

正視圖

*Cable specification and length can be customized.

3	RING NUT	Brass, nickel plated.		1	
2	Contact	Brass, 6 u" Gold plated .Male Contact.		5	
1	Connector	M8 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT:mm	TITLE : M8 B Code		
SCALE		2:1	Male R/A molded cable Ass'y		
UNLESS OTHERWISE SPECIFIED TOLERANCES:			P/N: B08D-M105RN		DR. SIBYL
.X ± 0.5 .XX ± 0.25					CH. ERIC
.XXX± 0.1 ANGLE ± 1°					
REV.	A1	SHEET 1/1	DWG.NO: B08D-M105RN		AP.