

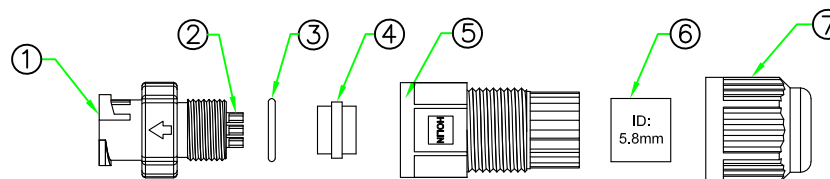
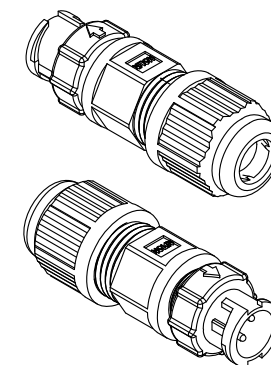
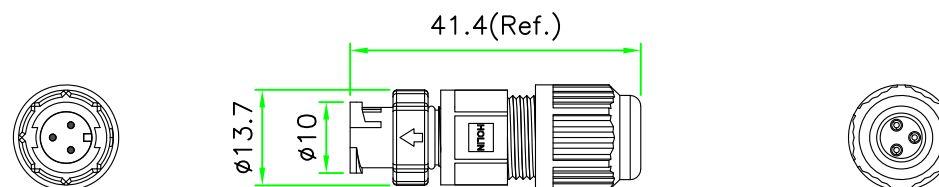


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/24/2013
note1	Change packing method.	Jul/22/2021



#2 Zipper PE Bag.

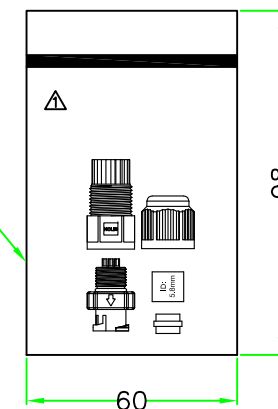

CAD-L102SA CAD-L103SA
Pin Assignment Front View
(前視圖)

7	CLAMP NUT	NYLON+GF.	BLACK	1	CAM8-CLAMP (70-135-N10)
6	SEAL	RUBBER. (Suitable for cable OD= 3~5.8mm.)	BLACK	1	CAM8-SEAL (166-135)
5	HOOD	NYLON.	BLACK	1	CAM8-HOOD (69-135-N6)
4	GASKET	RUBBER.	BLACK	1	CAM8-G (166-135)
3	O-RING	SILCON.	BLACK	1	CAA-O-S
2	CONTACT	BRASS, MALE PIN. 6 u" GOLD PLATED.		N	CAAM8-MPS-1.0
1	CONNECTOR	A SIZE MALE CONNECTOR INSERT.NYLON+GF.	BLACK	1	CAD-AL1xxM-S-B
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
	UNIT: mm	TITLE : Circular A Size Male Connector Male Pin Lock Type Field Installable Connector		
SCALE	1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: CAD-L1xxSA		DR. JAMES
X ±0.25	XX ±0.1			CH. ERIC
XXX ±0.05	ANGLE ±1°			AP.
REV. A	SHEET 1/1	DWG.NO: CAD-L1xxSA		