

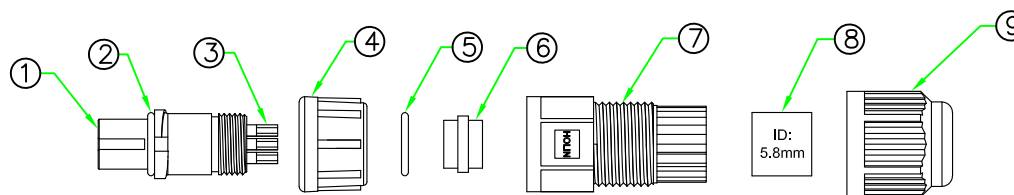
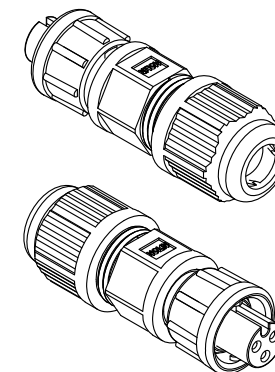
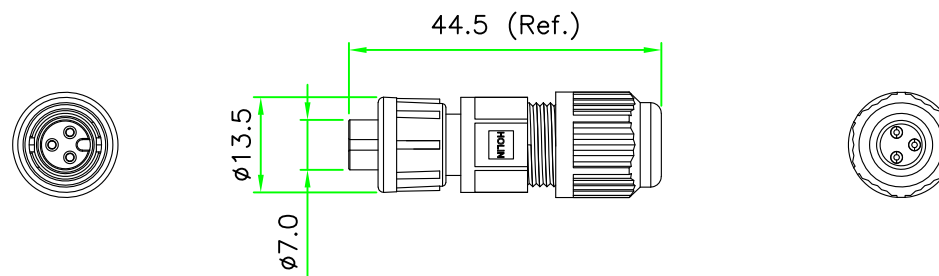


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/24/2013
note1	Change packing method.	Jul/22/2021



#2 Zipper PE Bag.

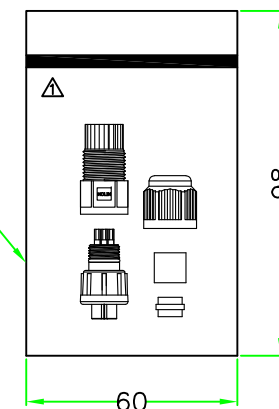

CAD-L202SA CAD-L203SA

Pin Assignment Front View

(前視圖)

9	CLAMP NUT	NYLON+GF.	BLACK	1	CAM8-CLAMP (70-135-N10)
8	SEAL	RUBBER. (Suitable for cable OD= 3~5.8mm.)	BLACK	1	CAM8-SEAL (166-135)
7	HOOD	NYLON.	BLACK	1	CAM8-HOOD (69-135-N6)
6	GASKET	RUBBER.	BLACK	1	CAM8-G (166-135)
5	O-RING	SILCON.	BLACK	1	CAA-O-S
4	LOCK NUT	NYLON+GF.	BLACK	1	A-LN (K07)
3	CONTACT	BRASS, FEMALE PIN. 6 u" GOLD PLATED.		N	M12F-1.0SPL20.5
2	O-RING	SILICON.	BLACK	1	CAA-O-S
1	CONNECTOR	A SIZE FEMALE CONNECTOR INSERT.NYLON+GF.	BLACK	1	CAD-A2xxF
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD 禾凌科技股份有限公司					
		UNIT:mm	TITLE : Circular A Size Female Connector Female Pin Lock Type Field Installable Connector		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.25 xx ± 0.1 xxx ±0.05 ANGLE ± 1°			P/N: CAD-L2xxSA		DR. JAMES
REV.					CH. ERIC
A		SHEET 1/1	DWG.NO: CAD-L2xxSA		AP.