

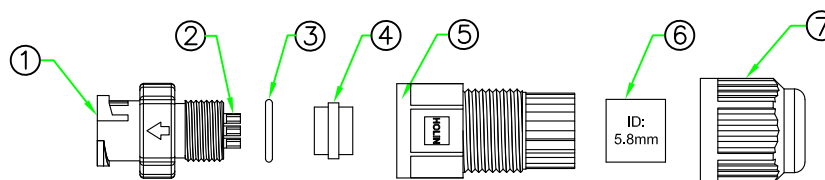
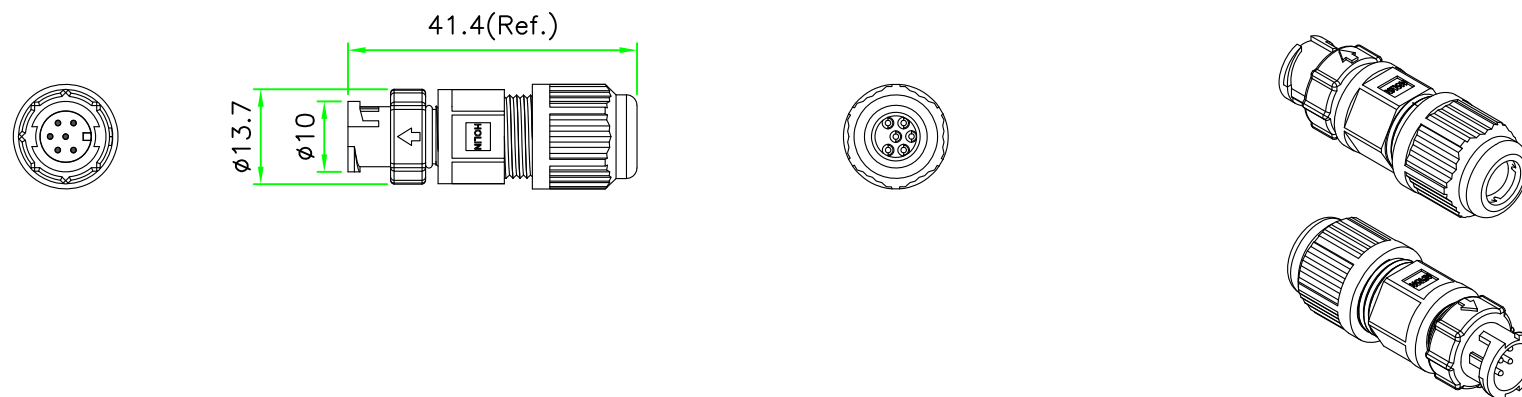


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/24/2013
note1	Change packing method & correct Pin Assignment.	Jul/22/2021




#2 Zipper PE Bag.

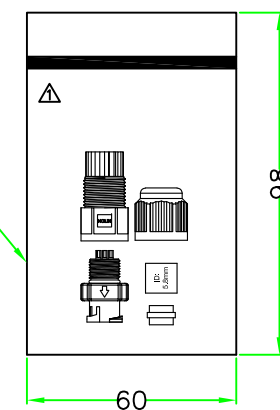

CAN-L104SA CAN-L105SA CAN-L106SA

Pin Assignment Front View Δ
(前視圖)

7	CLAMP NUT	NYLON+GF.	BLACK	1	CAM8-CLAMP (70-135-N10)	HOLIN® HIP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司  UNIT:mm SCALE 1:1 UNLESS OTHERWISE SPECIED TOLERANCES: X ±0.25 XX ± 0.1 XXX ±0.05 ANGLE ± 1° REV. SHEET P/N: CAN-L1xxSA DWG.NO: CAN-L1xxSA DR. JAMES CH. ERIC AP.			
6	SEAL	RUBBER. (Suitable for cable OD= 3~5.8mm.)	BLACK	1	CAM8-SEAL (166-135)				
5	HOOD	NYLON.	BLACK	1	CAM8-HOOD (69-135-N6)				
4	GASKET	RUBBER.	BLACK	1	CAM8-G (166-135)				
3	O-RING	SILCON.	BLACK	1	CAA-O-S				
2	CONTACT	BRASS, MALE PIN. 6 u" GOLD PLATED.		N	CAA&CBA-2A-MPS				
1	CONNECTOR	A SIZE MALE CONNECTOR INSERT.NYLON+GF.	BLACK	1	CAN-AL1xxM-S-B				
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1		