
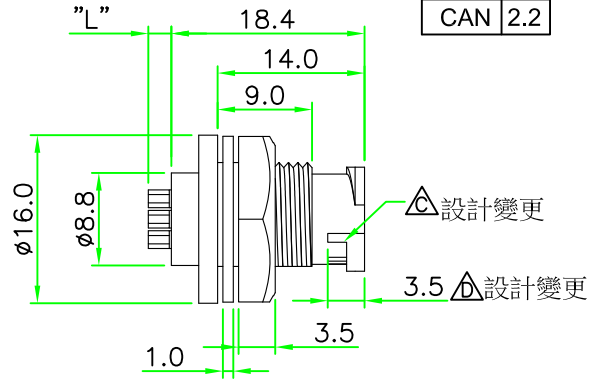




RECOMMENDED
PANEL CUT OUT

RoHS


IP66~68



P/N	L
CAD	2.2
CAN	2.2

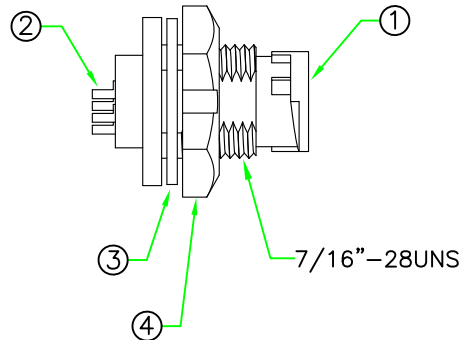

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/25/2014
A1	Modify Gasket Thickness	Jun/18/2015
B	Change Design	Oct/20/2015
C	Change Design	Nov/12/2019
D	Change Design	Feb/27/2020

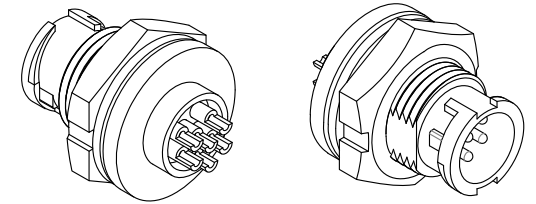

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

2. PANEL THICKNESS MAX. 3.0mm


3. HOW TO ORDER: CAX-L1xxCSR

02 - 2 PIN 04 - 4 PIN
03 - 3 PIN 05 - 5 PIN
06 - 6 PIN


D - CURRENT RATING 5A
N - CURRENT RATING 2A




CAD-L102CSR




CAD-L103CSR



CAN-L104CSR



CAN-L105CSR



CAN-L106CSR

PIN ASSIGNMENT FRONT VIEW (前视图)

4	HEX NUT	Nylon+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	A Size Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
	UNIT: mm
SCALE	1.5:1
TITLE : Circular A Size Male Connector Male Pin Rear Mount Lock Type Circular Flange Solder Bucket Pin	
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.5 XX ±0.25 XXX ±0.1 ANGLE ±1°	
REV.	SHEET
D	1/1
P/N:	CAX-L1xxCSR
DWG.NO:	CAX-L1xxCSR
DR.	SIBYL
CH.	JAMES
AP.	