




RECOMMENDED
PANEL CUT OUT

RoHS

IP66~68



P/N	D
CAD	ø1.0
CAN	ø0.8

REV.	DESCRIPTION	DATE
A	ISSUE	Jan/14/2015
A1	Modify Gasket Thickness	Jun/18/2015

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. WITHOUT WATERPROOF CAP REQUEST:

PANEL THICKNESS MAX. 9.2mm

WITH WATERPROOF CAP REQUEST:

PANEL THICKNESS MAX. 5.0mm


3. HOW TO ORDER: CAX-P1xxCPR

02 - 2 PIN 04 - 4 PIN

03 - 3 PIN 05 - 5 PIN

06 - 6 PIN

D - CURRENT RATING 5A
N - CURRENT RATING 2A

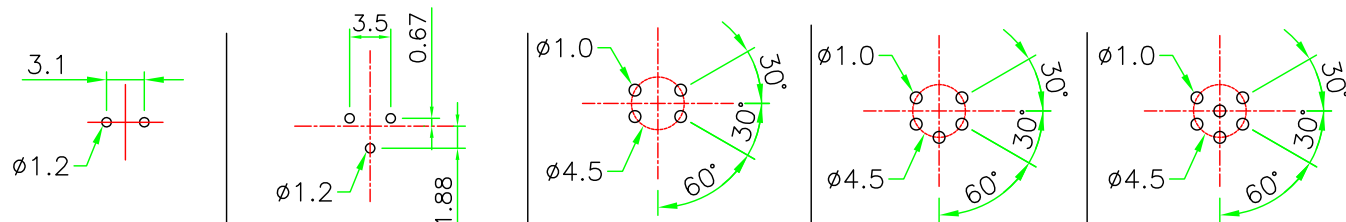

PCB LAYOUT



CAD-P102CPR



CAD-P103CPR



CAN-P104CPR



CAN-P105CPR



CAN-P106CPR

PIN ASSIGNMENT FRONT VIEW

(前視圖)

4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	A Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE Circular A Size Male Connector Male Pin Rear Mount Screw Type Round Flange PCB Pin		
SCALE	1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: CAx-P1xxCPR	DR. Patty	
REV.	SHEET		CH. ERIC	
A1	1/1	DWG.NO:	CAx-P1xxCPR	AP.