


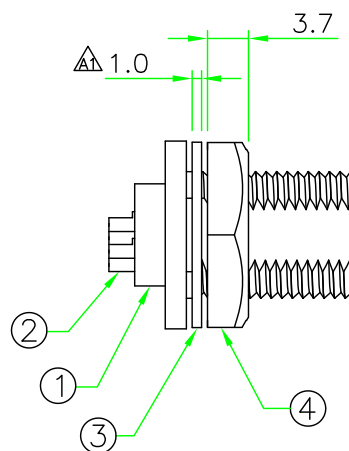


RECOMMENDED
PANEL CUT OUT

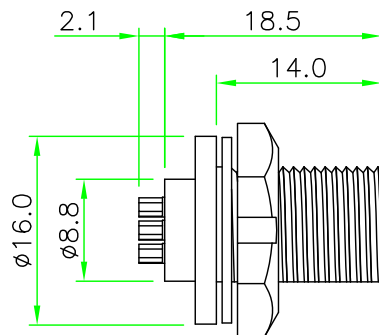

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/29/2014
A1	Modify Gasket Thickness	Jun/18/2015

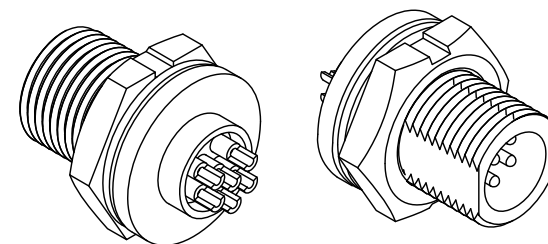

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. PANEL THICKNESS MAX. 4.0mm

3. HOW TO ORDER: CAX-P1xxCSR

02 - 2 PIN 04 - 4 PIN
03 - 3 PIN 05 - 5 PIN
06 - 6 PIN

D - CURRENT RATING 5A
N - CURRENT RATING 2A

OLD P/N: CAX-P1xxCS



PIN ASSIGNMENT FRONT VIEW
(前視圖)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV.	SHEET	DWG.NO:	DR.
4	HEX NUT	NYLON+GF.	BLACK	1		A1	1/1	CAX-P1xxCSR	Patty
3	GASKET	EPDM.	BLACK	1					ERIC
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N					
1	CONNECTOR	A Size Male Connector Insert.NYLON+GF.	BLACK	1					

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE
SCALE	Circular A Size Male Connector Male Pin Rear Mount Screw Type Round Flange Solder Bucket Pin
UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N:
.X ± 0.5 .XX ± 0.25	CAX-P1xxCSR
.XXX ± 0.1 ANGLE ± 1°	
REV.	DWG.NO:
A1	CAX-P1xxCSR