





RoHS

IP66~68

OLD P/N:CAx-P1xxQP
(原型號)



P/N	D
CAD	ø1.0
CAN	ø0.8

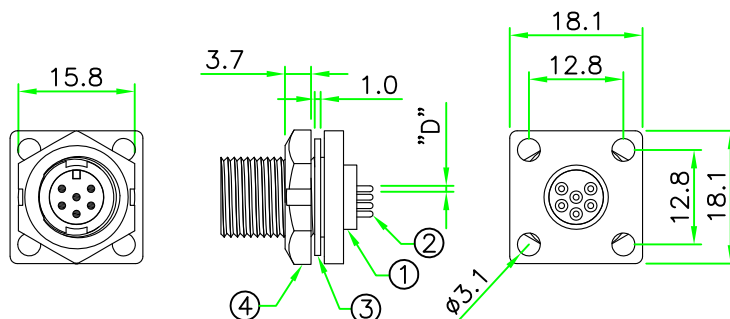


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. WITHOUT WATERPROOF CAP REQUEST:
PANEL THICKNESS MAX. 9.2mm
WITH WATERPROOF CAP REQUEST:
PANEL THICKNESS MAX. 5.0mm
3. HOW TO ORDER: CAx-P1xxQPR

– 02 - 2 PIN 04 - 4 PIN
03 - 3 PIN 05 - 5 PIN
06 - 6 PIN

– D - CURRENT RATING 5A
N - CURRENT RATING 2A

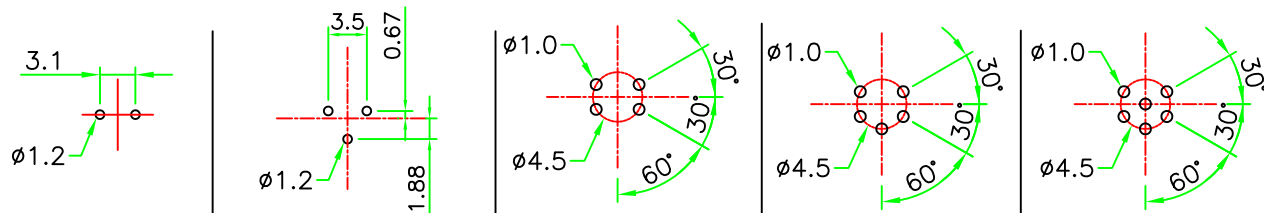

PCB LAYOUT



CAD-P102QPR



CAD-P103QPR



CAN-P104QPR



CAN-P105QPR



CAN-P106QPR

PIN ASSIGNMENT FRONT VIEW

(前視圖)

4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	A Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Jan/14/2015

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司



UNIT: mm

TITLE	Circular A Size Male Connector Male Pin Rear Mount Screw Type Square Flange PCB Pin
-------	---

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

.X ± 0.25	.XX ± 0.1
.XXX ± 0.05	ANGLE ± 1°

P/N: CAX-P1xxQPR

DR.	Patty
-----	-------

CH.	ERIC
-----	------

REV. A

SHEET
1 / 1

DWG.NO:	CAX-P1xxQPR
---------	-------------

AP.