


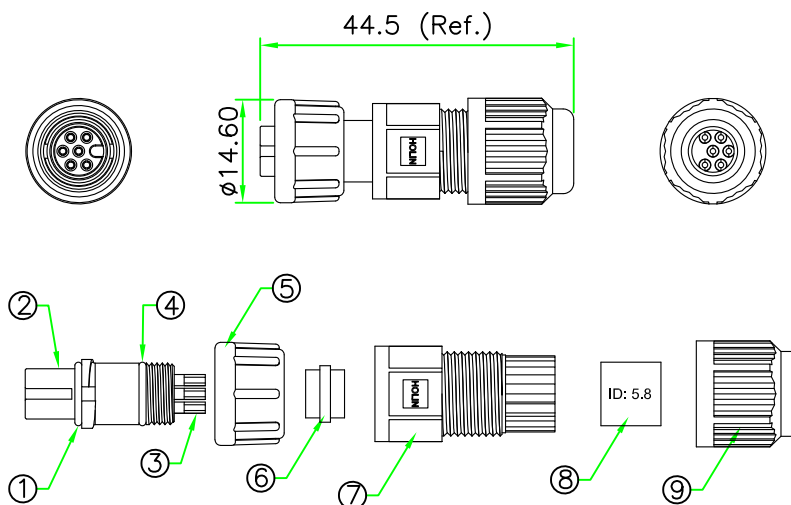



RoHS

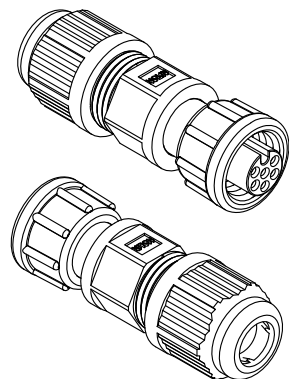


CAD-P202SA



CAD-P203SA



CAN-P204SA



CAN-P205SA



CAN-P206SA

PIN ASSIGNMENT FRONT VIEW
(前視圖)

9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM. (ID=5.8mm.)	BLACK	1	
7	HOOD	NYLON	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	SCREW NUT	NYLON+GF	BLACK	1	
4	O-RING	Silcon.	BLACK	1	
3	CONTACT	Brass ,Female Pin. 6u"Gold Plated.		N	
2	CONNECTOR	A Size Female Connector Insert, NYLON+GF.		1	
1	O-RING	Silcon.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Jul/15/2014
note1	Change packing method.	Jul/22/2021

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CAx-P2xxSA

02 - 2 PINS 05 - 5 PINS


03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

D - CURRENT RATING 5A

N - CURRENT RATING 2A

#2 Zipper PE Bag.

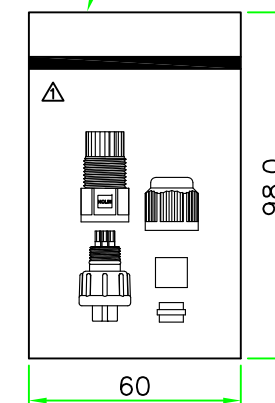

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular A Size Screw Type	
	SCALE 1:1	Female Connector Female Connector Female Pin Field Installable Plug	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLE ±1°		P/N: CAx-P2xxSA	DR. JAMES
REV. A		DWG.NO: CAx-P2xxSA	CH. ERIC
SHEET 1/1			AP.