



Technical drawing of the HOLIN connector showing three views: front, top, and side. The front view shows a circular connector with a 19.0 mm diameter. The top view shows the connector with dimensions 47.1 mm (width), 36.5 mm (height), and 9.5 mm (depth). The side view shows the connector with dimensions 19.0 mm (width) and 9.5 mm (depth). Callouts 1-10 identify specific features.

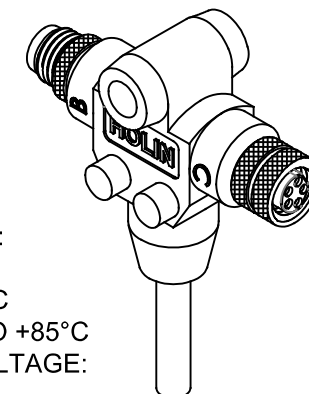


500V AC FOR ONE MINUTE

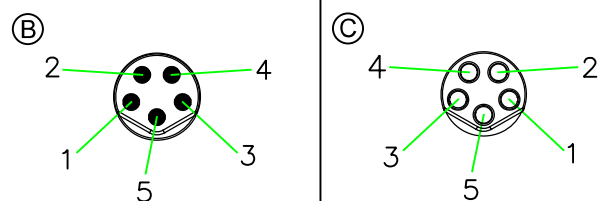


PIN ASSIGNMENT FRONT VIEW (前視圖)

※ Cable specification and length can be customized.

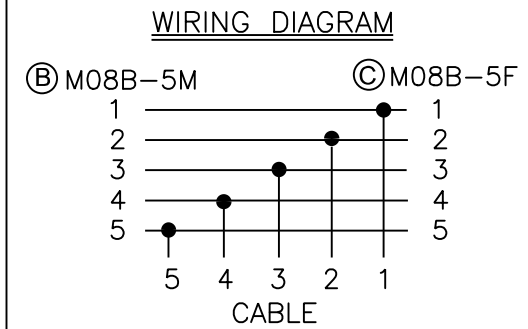

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

		UNIT: mm	TITLE : M8 B-Coding Male to Female Shielded Molded Cable
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 1.0 .X ± 1.0 ,XX ± 0.5 .XXX ± 0.25 ANGLE $\pm 1^\circ$		P/N: B08T-SCMF055	DR. SIBYL
			CH. JAMES
REV. A	SHEET 1 / 1	DWG.NO: B08T-SCMF055	AP.