



REV.	DESCRIPTION	DATE
A	ISSUE	Jun/20/2014

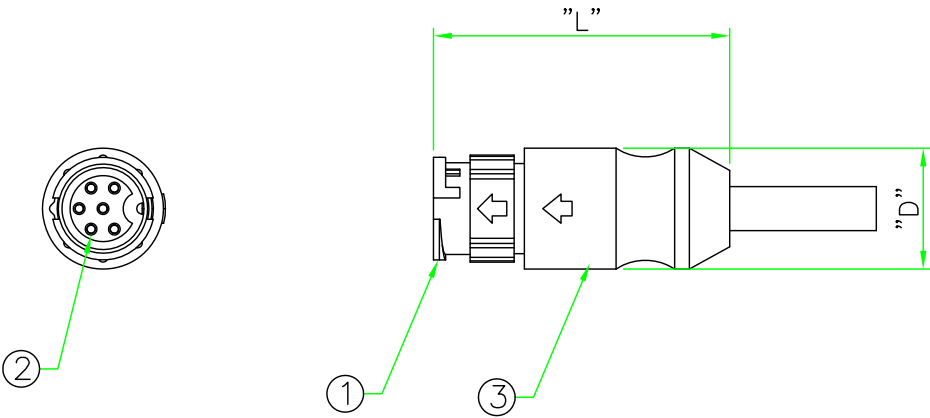

PIN NO.	L	D
2~5	37	ø15.1
6	40.3	ø16.5

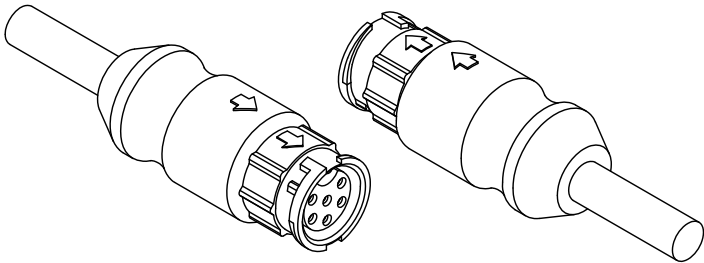

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 2. HOW TO ORDER: CBD-L3xxSN

- 02 - 2 PIN
03 - 3 PIN
04 - 4 PIN
05 - 5 PIN
06 - 6 PIN

CBD-L302SN

CBD-L303SN

CBD-L304SN

CBD-L305SN

CBD-L306SN

PIN ASSIGNMENT FRONT VIEW
(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN®
禾凌科技股份有限公司

HTP ASIA TECHNOLOGY CO., LTD.

	UNIT: mm	TITLE :	Circular B Size Lock Type Male Connector Female Pin Molded Cable
SCALE	1:1		
UNLESS OTHERWISE SPECIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX± 0.05 ANGLE ± 1°X		P/N:	CBD-L3xxSN
REV.	SHEET	DWG.NO:	CBD-L3xxSN
A	1/1		

DR. Patty

CH. ERIC

AP.