
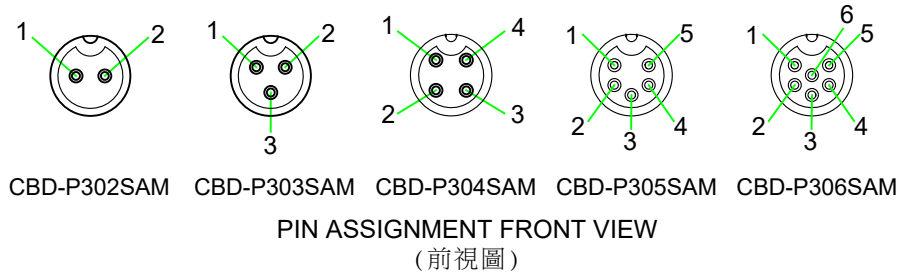
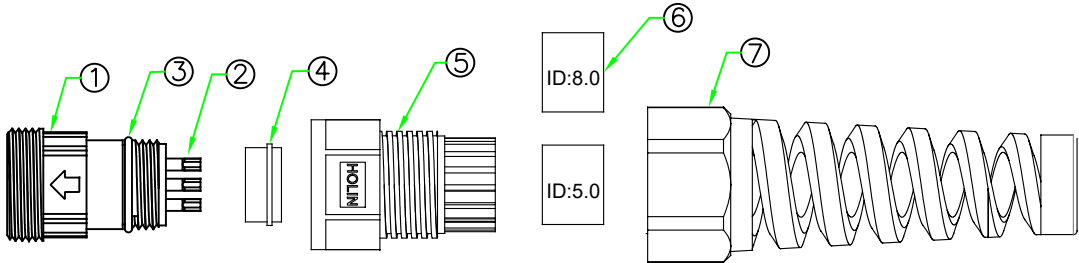
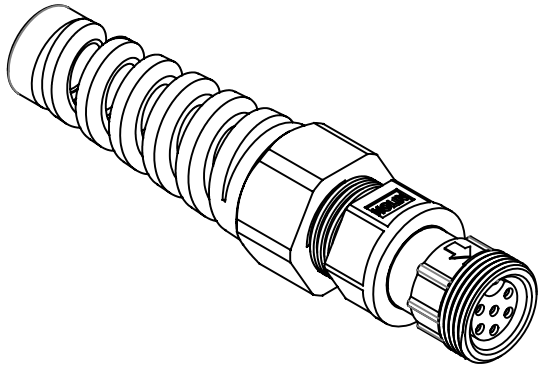
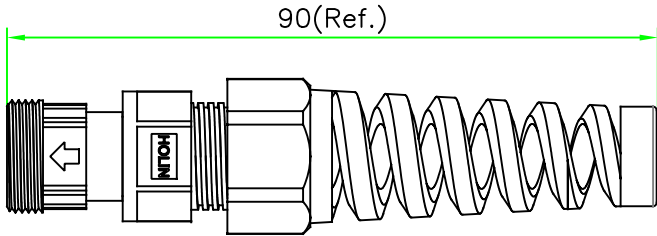



RoHS

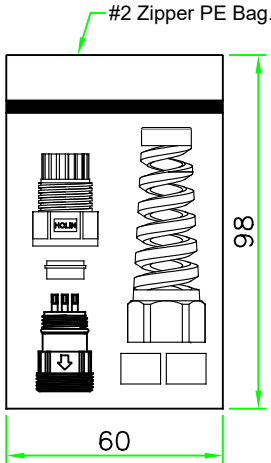

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: CBD-P3xxSAM
02 - 2 PIN
03 - 3 PIN
04 - 4 PIN
05 - 5 PIN
06 - 6 PIN

7	CLAMP NUT	NYLON.	BLACK	1	
6	TUBE	EPDM. (ID= 5.0 & 8.0mm.)	BLACK	2	
5	HOOD	NYLON.	BLACK	1	
4	GASKET	SILICON.	BLACK	1	
3	O-RING	EPDM.	BLACK	1	
2	CONTACT	BRASS, Female Pin. 6u"Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司								
		UNIT: mm	TITLE : Circular B Size Screw Type Male Connector Female Pin With S/R Field Installable Plug					
SCALE		1:1						
UNLESS OTHERWISE SPECIFIED TOLERANCES:								
.XX. ±1.0								
.X ±1.0 .XX ±0.5								
.XXX ±0.25 ANGLE ± 1°								
REV.	SHEET	DWG.NO:		DR. James				
A	1/1	CBD-P3xxSAM		CH. Eric				
		CBD-P3xxSAM		AP.				