
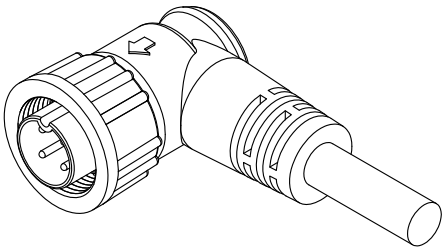


RoHS


IP66~68

REV.	DESCRIPTION	DATE
A	ISSUE	Jun/10/2014

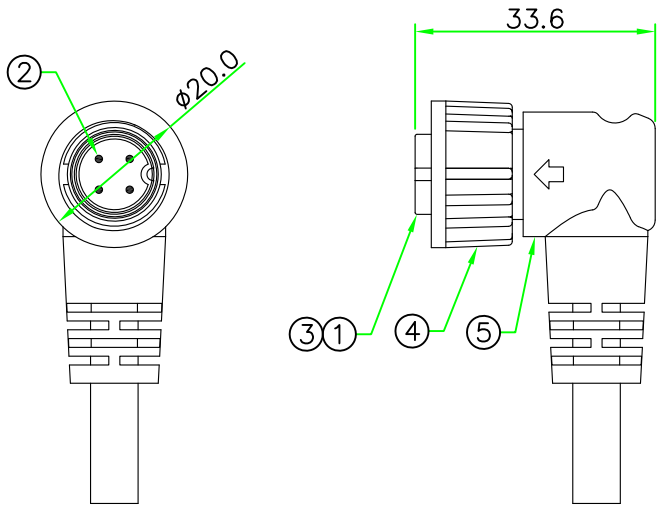

- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 2. HOW TO ORDER: CBD-P4xxRM

- 02 - 2 PIN
- 03 - 3 PIN
- 04 - 4 PIN
- 05 - 5 PIN
- 06 - 6 PIN

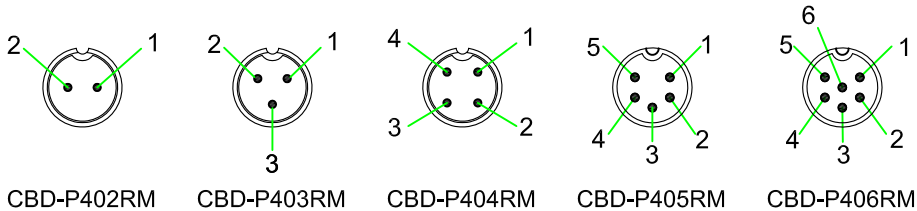

PIN ASSIGNMENT FRONT VIEW
(前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	SCREW NUT	NYLON+GF.	BLACK	1	
3	O-RING	EPDM.	BLACK	1	
2	CONTACT	Brass ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : Circular B Size Screw Type Female connector Male Pin Ringht Angle Molded Cable	
SCALE	1:1		
UNLESS OTHERWISE SPECIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX± 0.05 ANGLE ± 1°X		P/N: CBD-P4xxRM	DR. Patty
			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: CBD-P4xxRM	AP.