

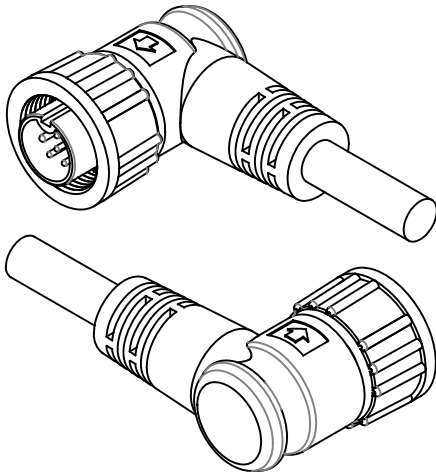



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/19/2024

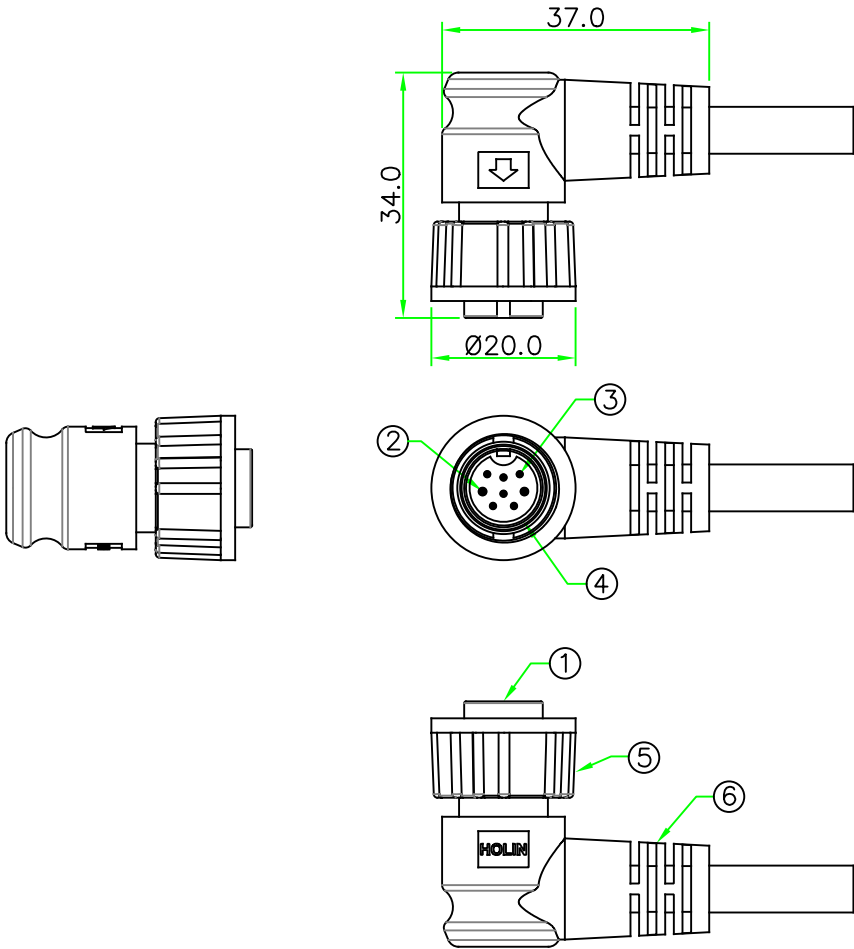

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

FRONT VIEW (前視圖)						HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
6	OVERMOLD	PVC or PU.	BLACK	1	90-135		UNIT: mm	TITLE : Circular B Size Female/Male Connector Screw Type R/A Molded Cable Ass'y		
5	SCREW NUT	NYLON+GF.	BLACK	1			SCALE			
4	O-RING	NBR.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°			P/N: CBDN-P426RM	DR. JAMES
3	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		6						CH. ERIC
2	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		2						
1	CONNECTOR	B Size Female/Male Connector Insert, NYLON+GF.	BLACK	1		REV.	SHEET	DWG.NO:	CBDN-P426RM	AP.
No.	PART NAME	DESCRIPTION			COLOR	Q'TY	REMARKS	A	1/1	