



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/19/2024

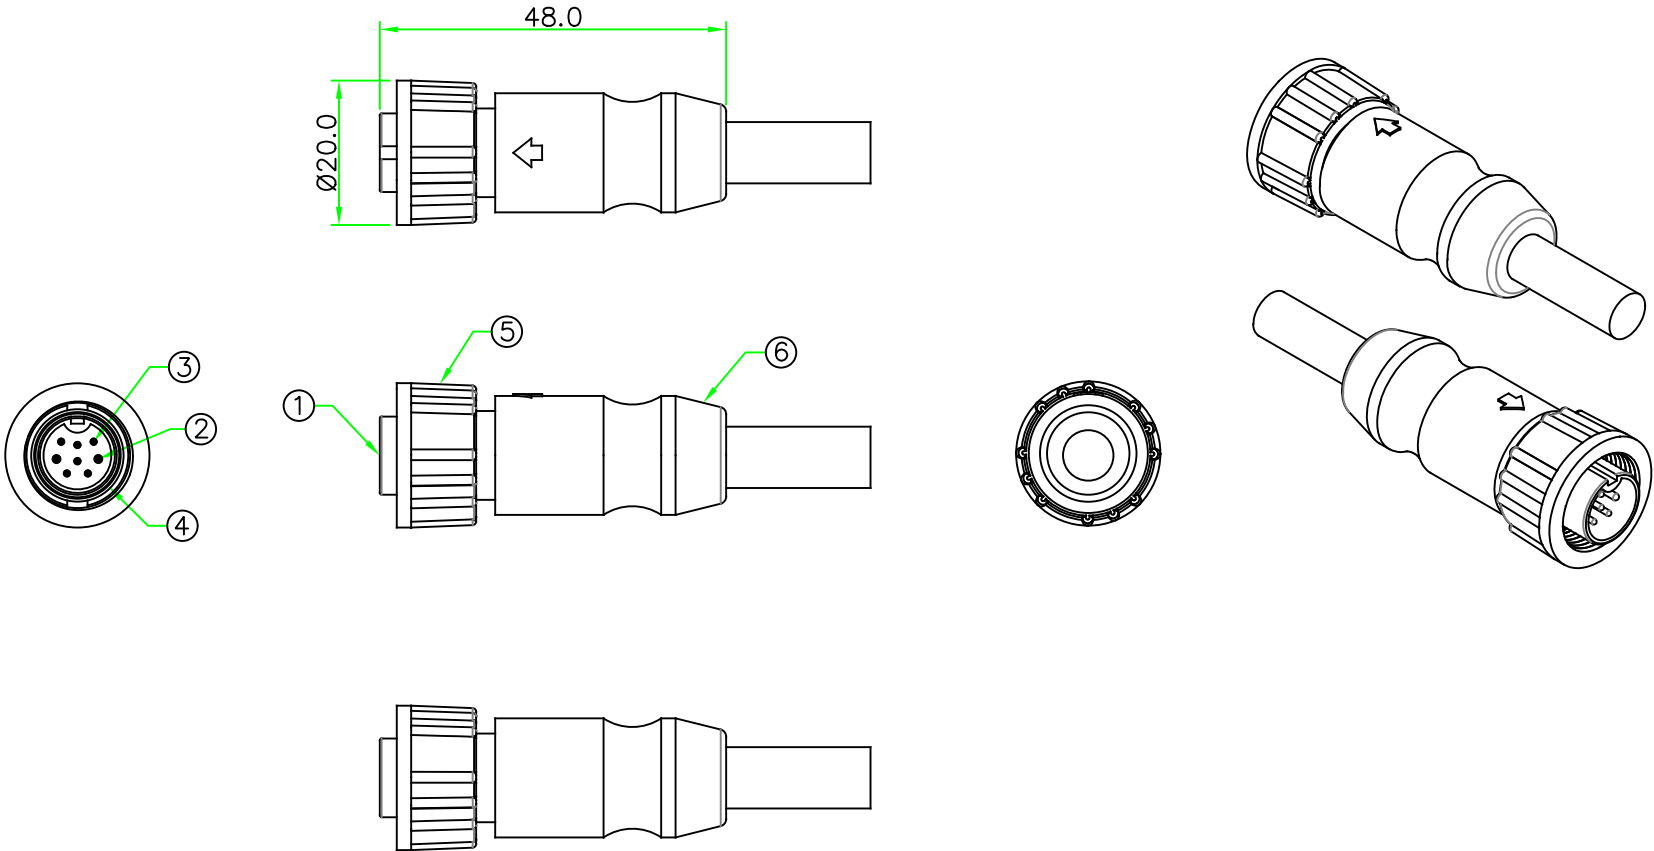

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

						HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
6	OVERMOLD	PVC or PU.	BLACK	1	98-135-N2		UNIT: mm	TITLE : Circular B Size Female/Male Connector Screw Type Molded Cable Ass'y	
5	SCREW NUT	NYLON+GF.	BLACK	1		SCALE	1:1		
4	O-RING	NBR.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N:	
3	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		6				CBDN-P426SN	
2	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		2				CH. ERIC	
1	CONNECTOR	B Size Female/Male Connector Insert, NYLON+GF.	BLACK	1		REV.	SHEET	DWG.NO:	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1	CBDN-P426SN	
								AP.	