
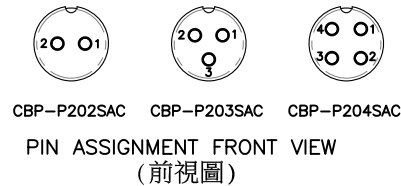









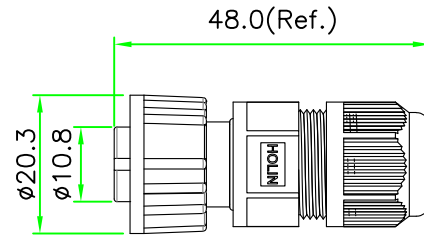



RoHS



REV.	DESCRIPTION	DATE
A	ISSUE	Sep/26/2020

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBP-P2xxSAC


02 - 2 PIN

03 - 3 PIN

04 - 4 PIN

P - CURRENT RATING 10A

#2 Zipper PE Bag.

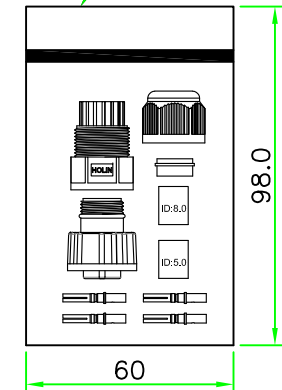

9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	SILICON.	BLACK	1	
5	SCREW NUT	NYLON+GF	BLACK	1	
4	CONTACT	BRASS ,Female Pin. 6u"Gold Plated.		N	
3	O-RING	EPDM.	BLACK	1	
2	CONNECTOR	B Size Female Connector Insert, NYLON+GF.		1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
	UNIT: mm
SCALE	1:1
TITLE : Circular B Size Screw Type Female Connector Female Pin Field Installable Plug with Crimp Pin	
P/N: CBP-P2xxSAC	
DWG.NO: CBP-P2xxSAC	
DR. James	
CH. ERIC	
AP.	

UNLESS OTHERWISE
SPECIFIED TOLERANCES:
X ±1.0 XX ±0.5
XXX ±0.25 ANGLE ±1°
REV. SHEET

A 1/1