

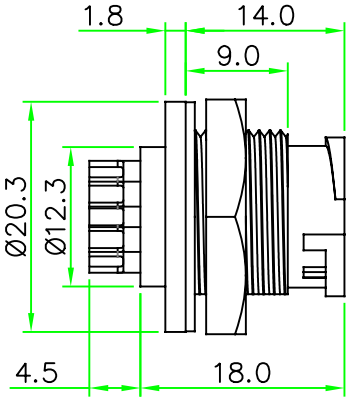

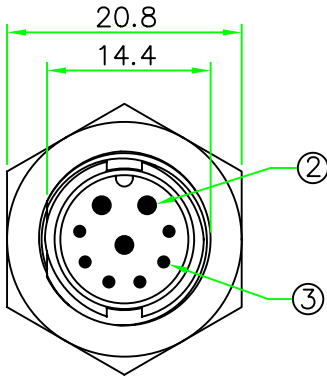
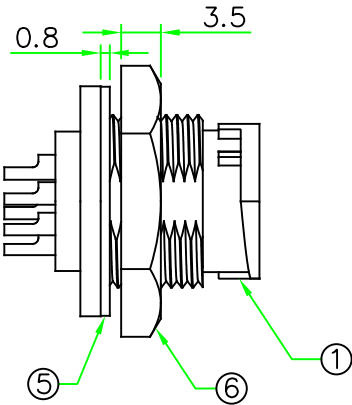


RECOMMENDED
PANEL CUT OUT

RoHS



REV.	DESCRIPTION	DATE
A	ISSUE	Jul/22/2024

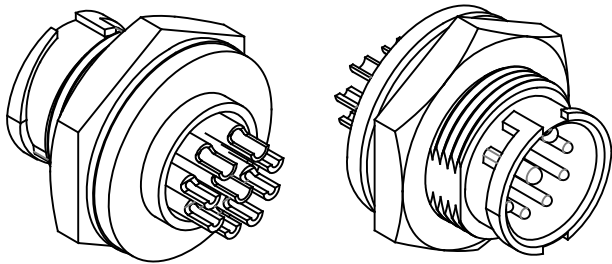

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

6	HEX NUT	Nylon + GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	Epoxy.	BLACK	1	
3	CONTACT	BRASS , 6u" Gold Plated. Male Contact.		6	
2	CONTACT	BRASS , 6u" Gold Plated. Male Contact.		3	
1	CONNECTOR	B Size Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE Circular B Size Male Connector Male Pin Rear Mount Lock Type Round Flange Solder Bucket Pin	
SCALE 1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: CBPD-L136CSR	DR. JAMES
			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: CBPD-L136CSR	AP.