

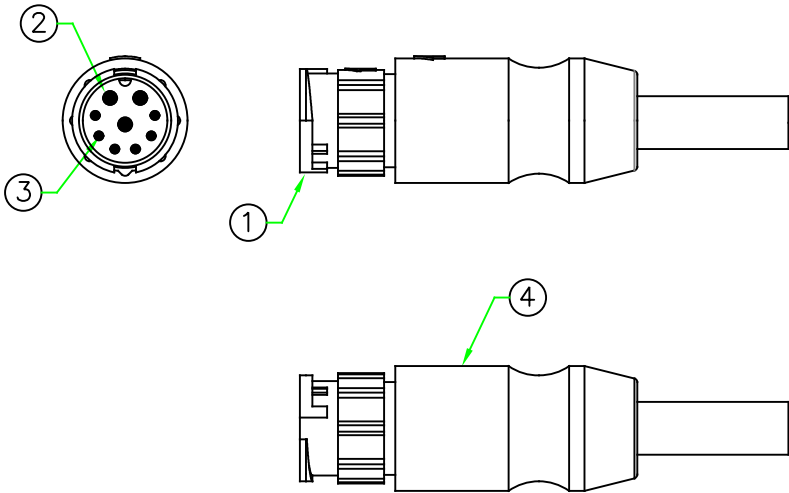
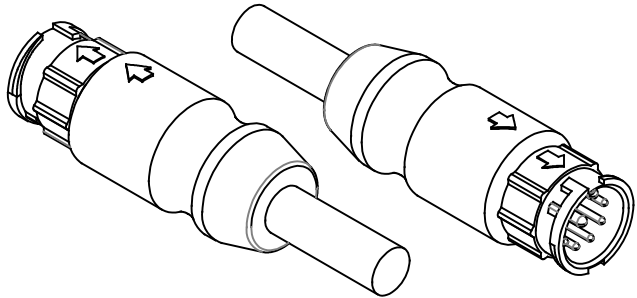


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/27/2024

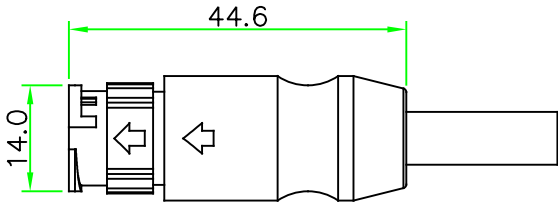

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

4	OVERMOLD	PVC or PU.	BLACK	1	98-135
3	CONTACT	Brass, Male Pin. 6u" Gold Plated.		6	
2	CONTACT	Brass, Male Pin. 6u" Gold Plated.		3	
1	CONNECTOR	B Size Male Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular B Size Lock Type Male Connector Male Pin Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°			P/N: CBPD-L136SN		DR. SIBYL
					CH. JAMES
			REV.	SHEET	DWG.NO: CBPD-L136SN
A	1/1				