

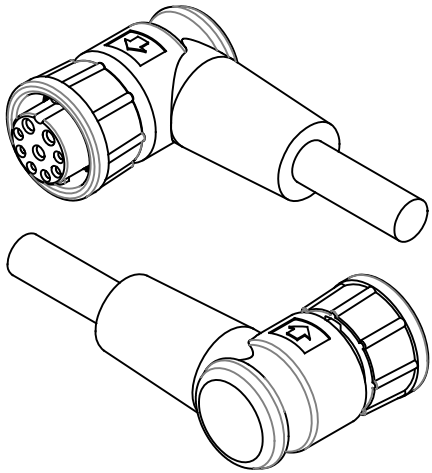


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/16/2024

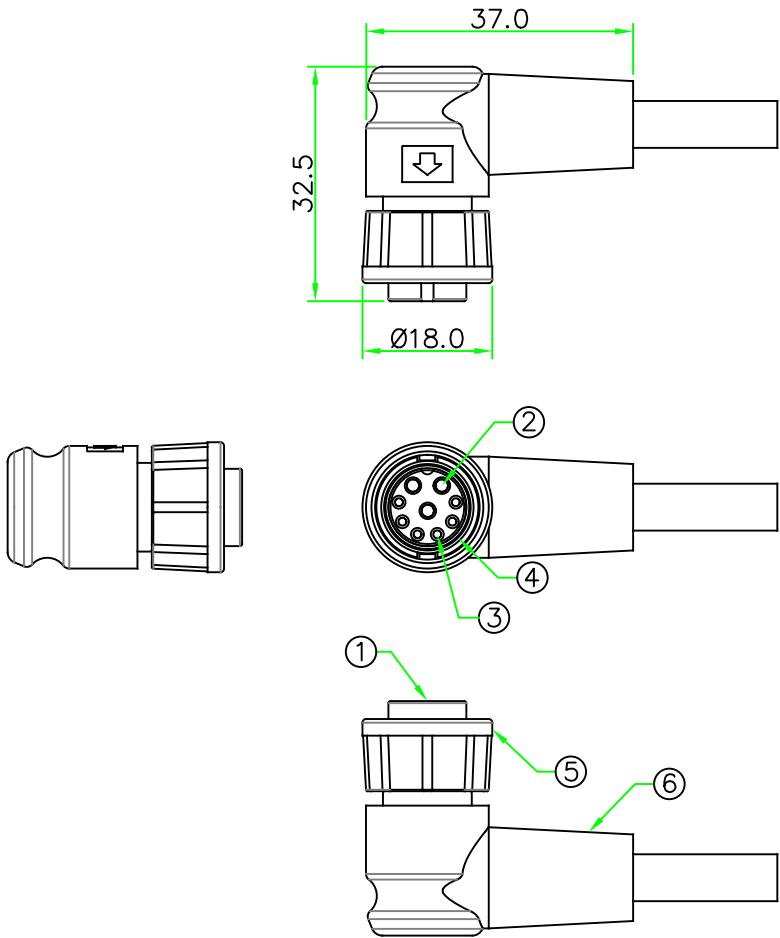

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

6	OVERMOLD	PVC or PU.	BLACK	1	90-135
5	LOCK NUT	NYLON+GF.	BLACK	1	
4	O-RING	NBR.	BLACK	1	
3	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		6	
2	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		3	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : Circular B Size Female Connector Lock Type R/A Molded Cable Ass'y			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. JAMES	
XX. ±1.0		CBPD-L236RN		CH. ERIC	
.X ±1.0 .XX ±0.5					
.XXX ±0.25 ANGLE ± 1°					
REV.	SHEET	DWG.NO:		AP.	
A	1/1	CBPD-L236RN			