

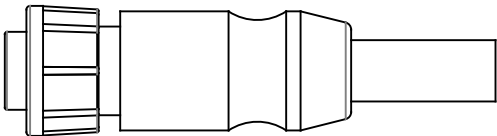
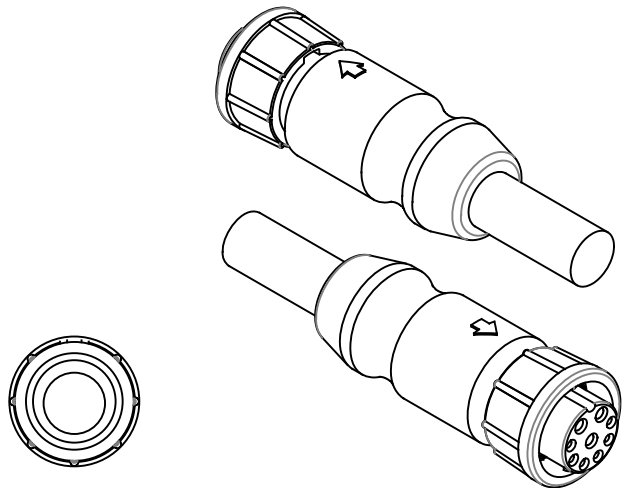
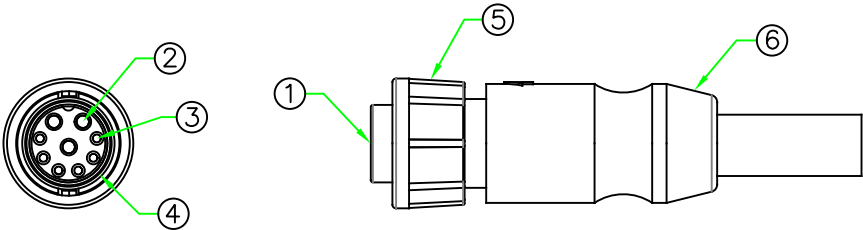


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/16/2024

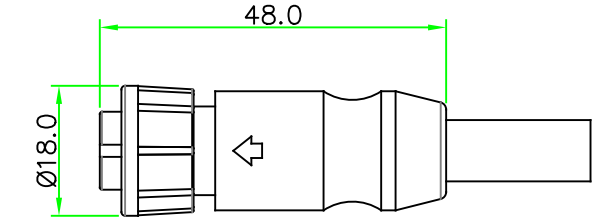

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

						HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
6	OVERMOLD	PVC or PU.	BLACK	1	98-135-N2		UNIT: mm	TITLE : Circular B Size Female Connector Lock Type Molded Cable Ass'y	
5	LOCK NUT	NYLON+GF.	BLACK	1		SCALE	1:1		
4	O-RING	NBR.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N:	DR. JAMES
3	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		6				CBPD-L236SN	CH. ERIC
2	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		3					
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1		REV.	SHEET	DWG.NO:	AP.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1	CBPD-L236SN	