




RoHS 機密

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/19/2014
A1	Change design. (EC-112016)	Feb/29/2024

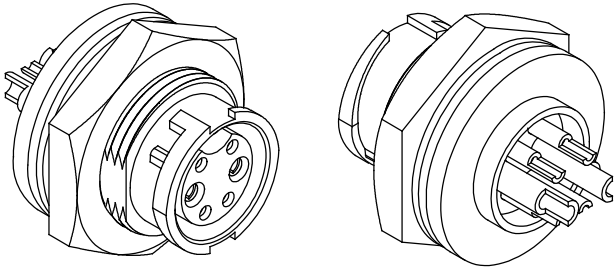

RECOMMENDED
PANEL CUT OUT

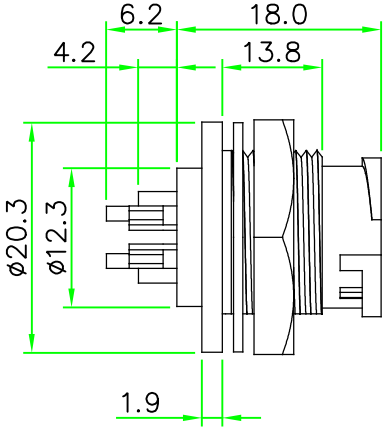

NOTES:




1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A+10A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

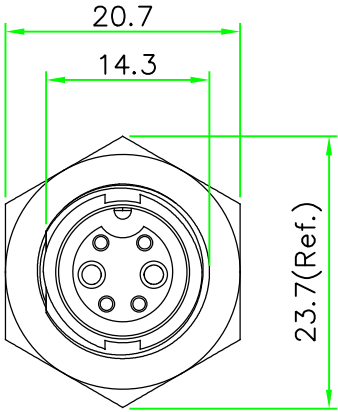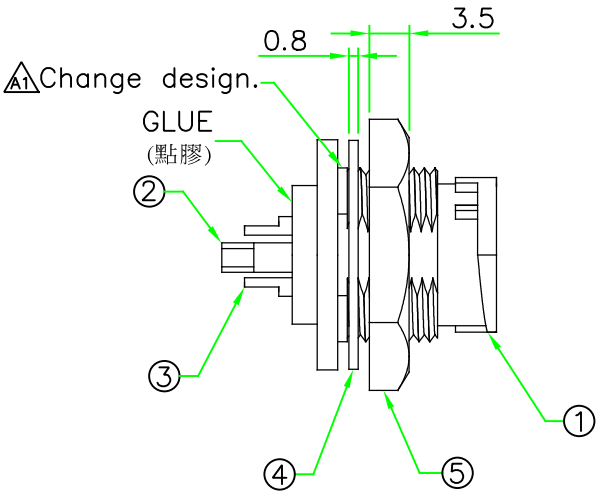

Pin Assignment
Front View
(前視圖)

5	HEX NUT	Nylon + GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CONTACT	Brass , 6 u" Gold Plated . Female Contact.		4	
2	CONTACT	Brass , 6 u" Gold Plated . Female Contact.		2	
1	CONNECTOR	B Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
 		UNIT: mm	TITLE Circular B Size Male Connector Female Pin Rear Mount Lock Type Round Flange Solder Bucket Pin		
SCALE		1.5:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: xx, ± 0.2 .x ± 0.15 .xx ± 0.15 .xxx ± 0.1 ANGLE ± 1°			P/N: CBPD-L324CSR	DR.	SIBYL
				CH.	JAMES
			REV.	SHEET	DWG.NO:
A1	1/1	CBPD-L324CSR			