

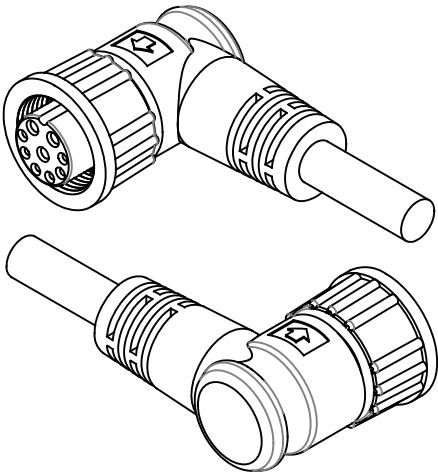


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/16/2024

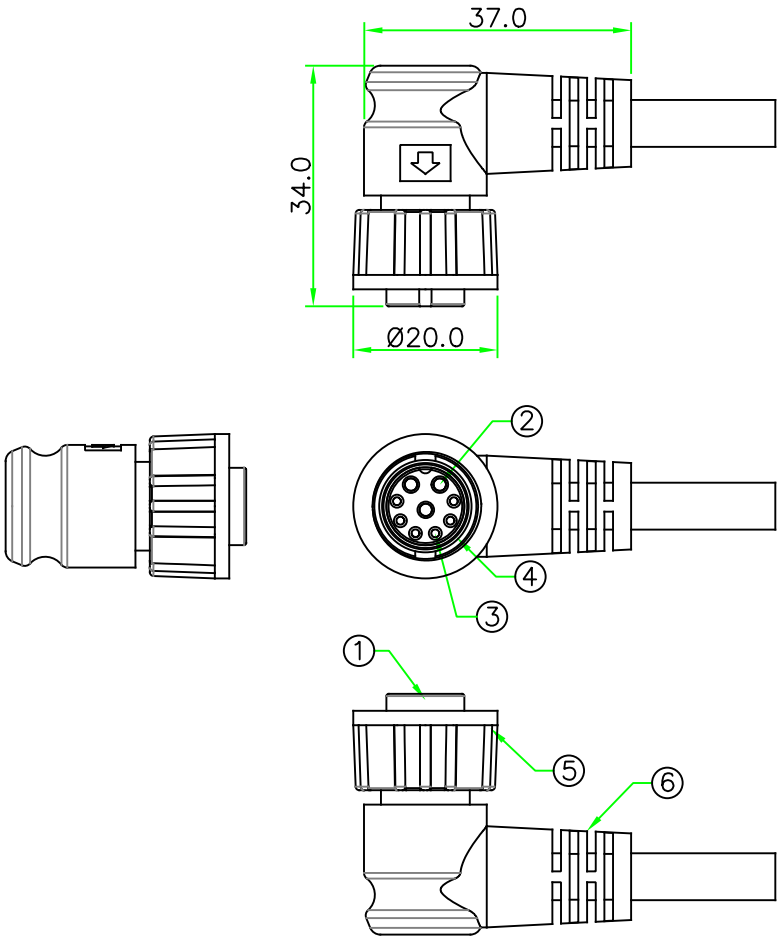

PIN ASSIGNMENT  
FRONT VIEW  
(前視圖)

						HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
6	OVERMOLD	PVC or PU.	BLACK	1	90-135		UNIT: mm	TITLE : Circular B Size Female Connector Screw Type R/A Molded Cable Ass'y	
5	SCREW NUT	NYLON+GF.	BLACK	1			SCALE 1:1		
4	O-RING	NBR.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N: CBPD-P236RM	DR. JAMES
3	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		6					CH. ERIC
2	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		3					
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1		REV. A	SHEET 1/1	DWG.NO: CBPD-P236RM	AP.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				