


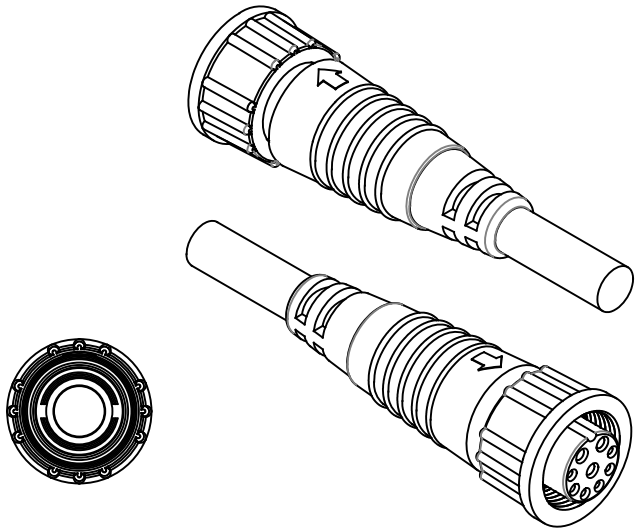
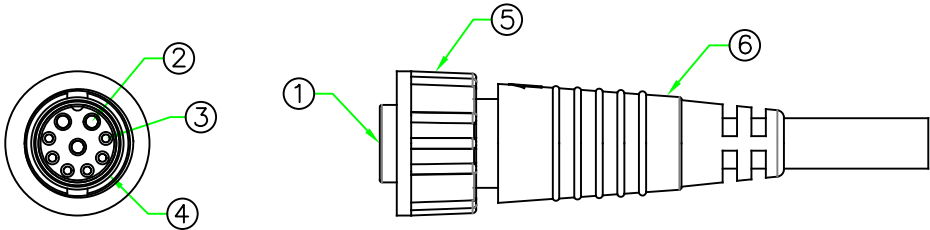


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/16/2024

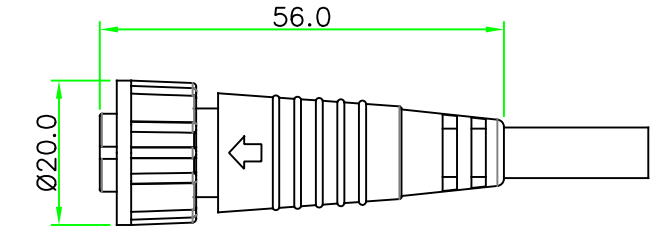

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

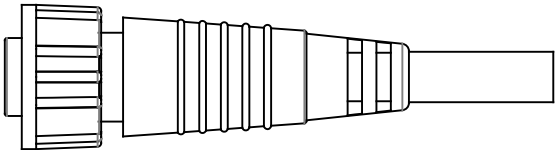

6	OVERMOLD	PVC or PU.	BLACK	1	98-135-N3
5	SCREW NUT	NYLON+GF.	BLACK	1	
4	O-RING	NBR.	BLACK	1	
3	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		6	
2	CONTACT	BRASS ,Female Pin. 6u" Gold Plated.		3	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular B Size Female Connector Screw Type Molded Cable Ass'y		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. JAMES	
XX. ±1.0		CBPD-P236SM		CH. ERIC	
.X ±1.0 .XX ±0.5					
.XXX ±0.25 ANGLE ± 1°					
REV.		SHEET	DWG.NO:	AP.	
A		1/1	CBPD-P236SM		