


RoHS

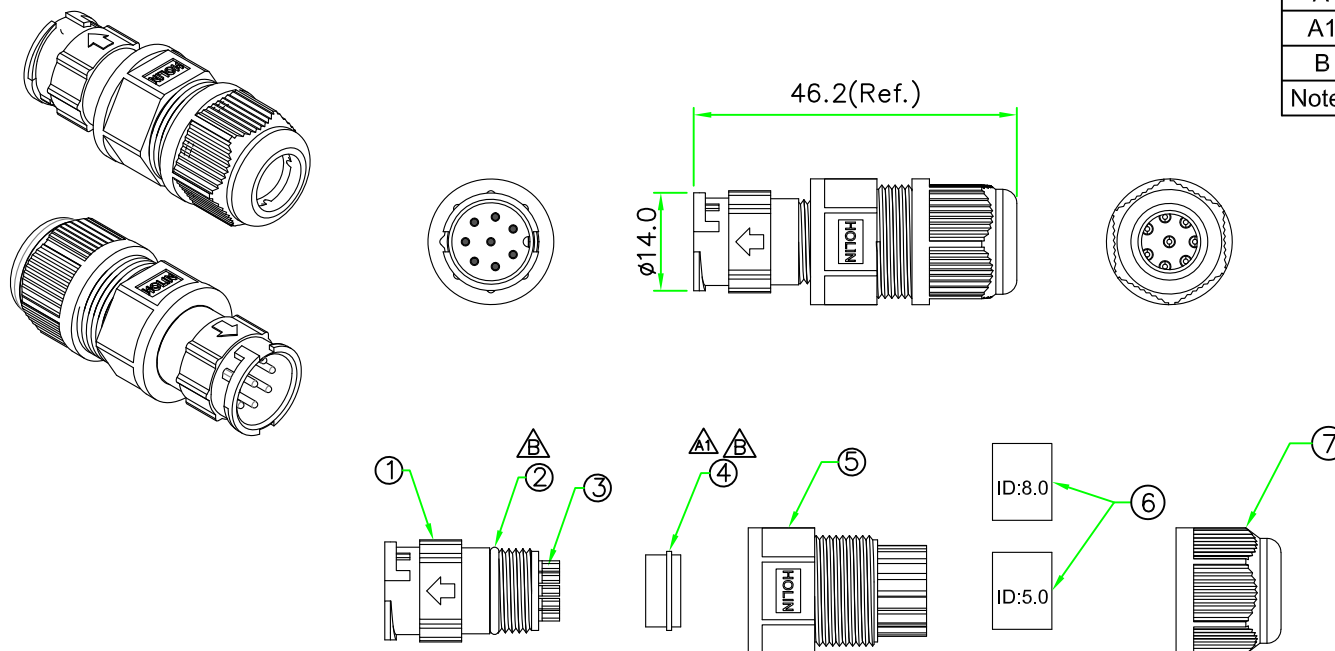

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/04/2008
A1	Change ④ Shape And Add Pin Assignment	Jun/17/2014
B	Change O-Ring.(EC-108035)	Dec/04/2019
Note1	Change packing method.	Sep/11/2021

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L1xxSA

02 - 2 PIN 07 - 7 PIN

03 - 3 PIN 08 - 8 PIN

04 - 4 PIN 10 - 10 PIN

05 - 5 PIN 12 - 12 PIN



06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

#2 Zipper PE Bag.

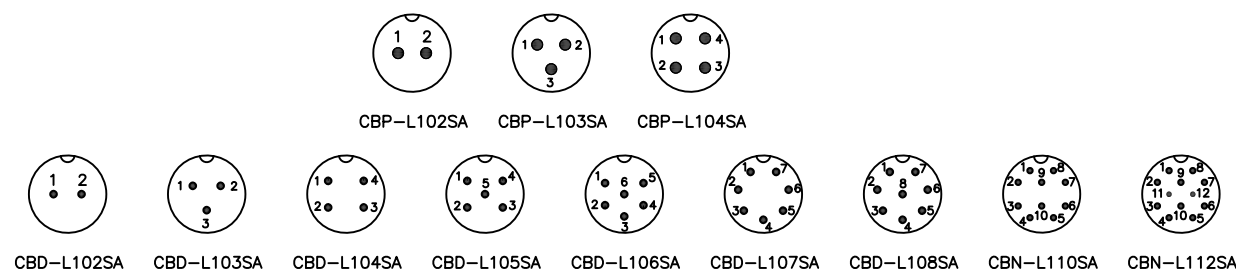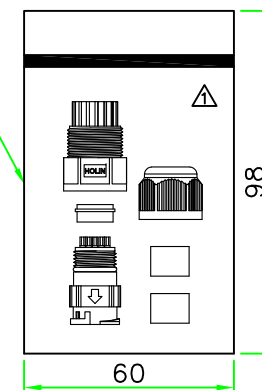

PIN ASSIGNMENT FRONT VIEW (前視圖) A

7	CLAMP NUT	NYLON+GF	BLACK	1	
6	TUBE	EPDM.(ID=5.0 & 8.0mm.)	BLACK	2	
5	HOOD	NYLON	BLACK	1	
4	GASKET	Silicon. A	BLACK	1	
3	CONTACT	BRASS, Male Pin. 6u"Gold Plated.		1	
2	O-RING	EPDM. A	BLACK	1	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE Circular B Size Lock Type Male Connector Male Pin Field Installable Plug			
SCALE	1.5:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: CBx-L1xxSA		DR. JAMES	
.X ± 0.5 .XX ± 0.25				CH. ERIC	
.XXX ± 0.1 ANGLE ± 1°					
REV. B	SHEET 1/1	DWG.NO: CBx-L1xxSA		AP.	