RoHS

IP67

NOTE	DESCRIPTION	DATE
1	加註模號(EC-109007)	Apr/15/2020

REV.	DESCRIPTION	DATE	NOTE
A	ISSUE	Apr/15/2020	1

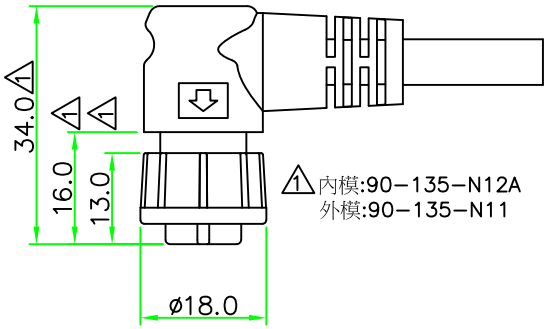

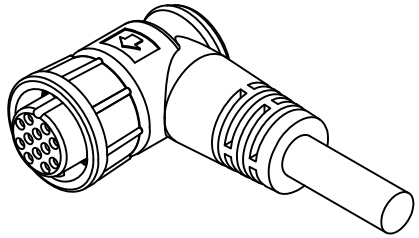

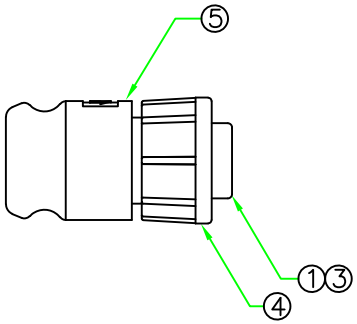

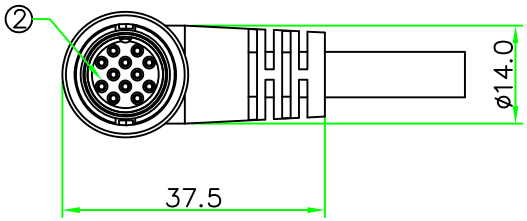

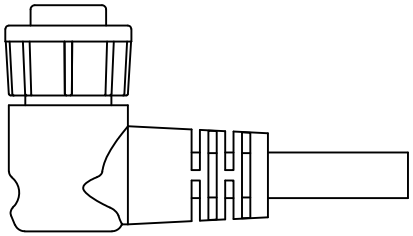

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   CURRENT RATING: 2A / 5A /10A
   CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
   DIELECTRIC WITHSTANDING VOLTAGE:
   500V AC FOR ONE MINUTE
2. HOW TO ORDER: CBx-L2xxRM

   02 - 2 PIN 07 - 7 PIN
   03 - 3 PIN 08 - 8 PIN
   04 - 4 PIN 10 - 10 PIN
   05 - 5 PIN 12 - 12 PIN
   06 - 6 PIN

   P - CURRENT RATING 10A
   D - CURRENT RATING 5A
   N - CURRENT RATING 2A

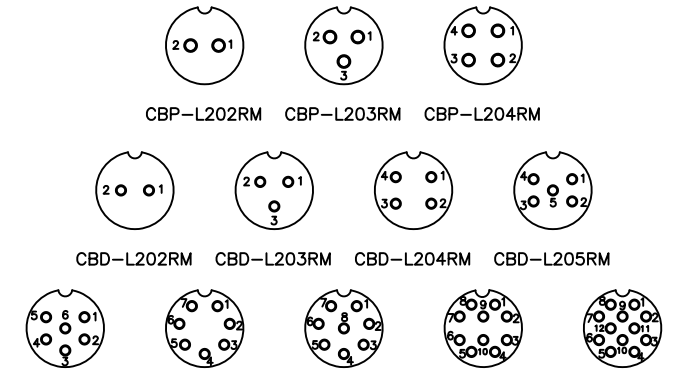

PIN ASSIGNMENT FRONT VIEW
(前視圖)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	OVERMOLD	PVC or PU.	BLACK	1	
4	LOCK NUT	NYLON+GF.	BLACK	1	
3	O-RING	NBR	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE :	Circular B Size Lock Type Female Connector Female Pin Ringht Angle Molded Cable	
SCALE 1:1			
UNLESS OTHERWISE SPECIPED TOLERANCES: .x ± 0.5 .xx ± 0.25 .xxx± 0.1 ANGLE ± 1°	P/N:	CBx-L2xxRM	DR. SIBYL
			CH. JAMES
REV. A	SHEET 1/1	DWG.NO: CBx-L2xxRM	AP.