





RoHS

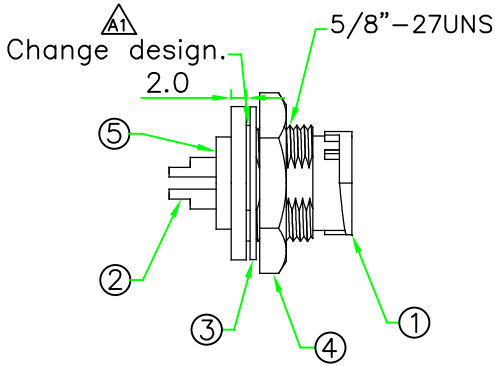


RECOMMENDED
PANEL CUT OUT

P/N	L
CBP	6.9
CBD	5.0

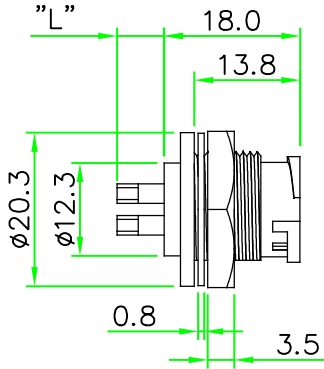

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/28/2015
A1	Change design. (EC-112016)	Feb/29/2024

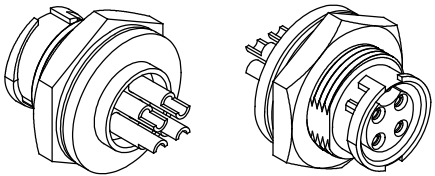

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 10A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. PANEL THICKNESS MAX. 4.0

3. HOW TO ORDER: CBx-L3xxCSR

02 - 2 PIN

03 - 3 PIN


04 - 4 PIN

05 - 5 PIN

06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

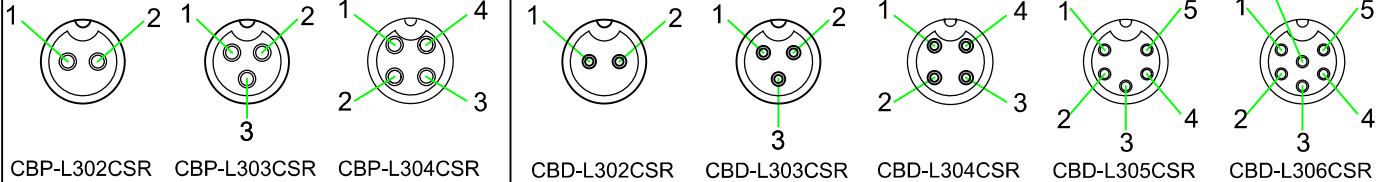

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	GLUE	Epoxy.	BLACK		
4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	B Size Male Connector Insert. NYLON+GF. (A1)	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE Circular B Size Male Connector Female Pin Rear Mount Lock Type Round Flange Solder Bucket Pin		
SCALE	1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		P/N: CBx-L3xxCSR	DR.	SIBYL
			CH.	JAMES
		REV.	SHEET	DWG.NO:
A1	1/1	CBx-L3xxCSR		