
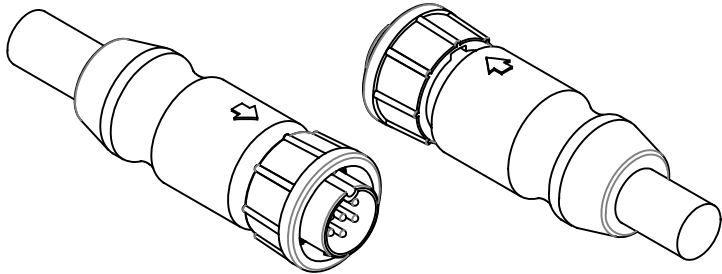
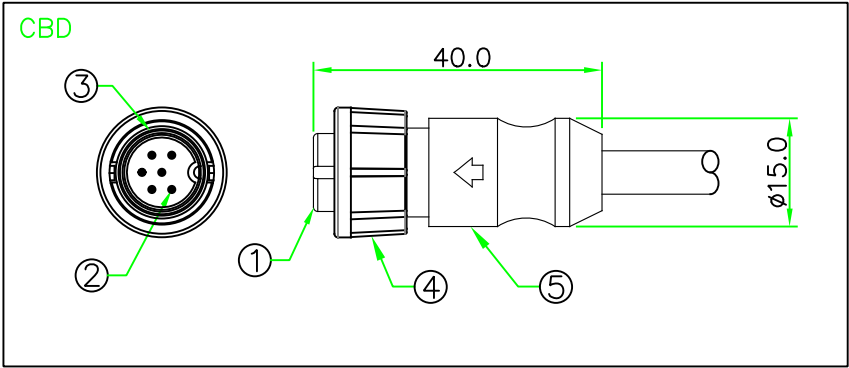


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Jun/16/2024

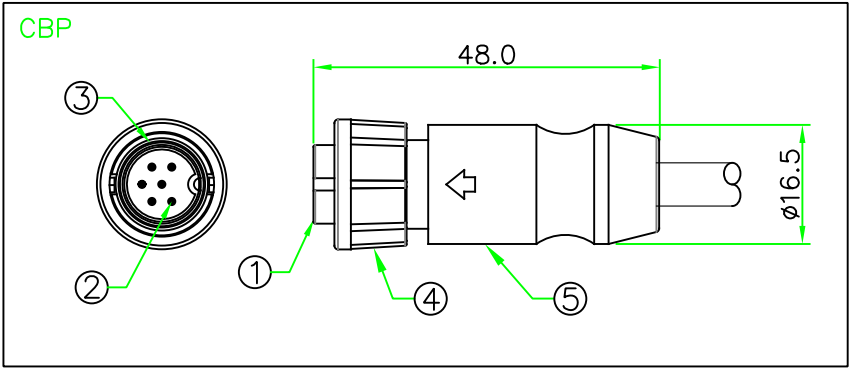

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 10A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CBx-L4xxSN

02 - 2 PIN
03 - 3 PIN
04 - 4 PIN
05 - 5 PIN
06 - 6 PIN

P - CURRENT RATING 10A
D - CURRENT RATING 5A

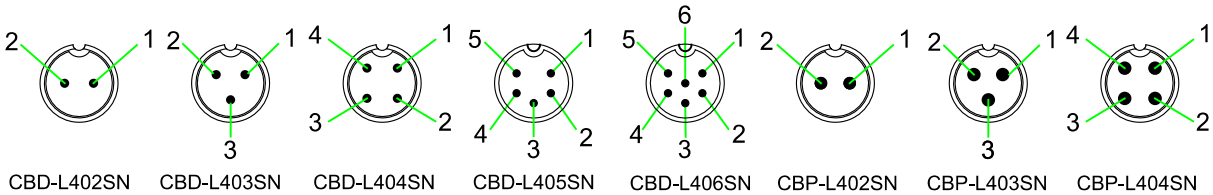

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	LOCK NUT	NYLON+GF.	BLACK	1	
3	O-RING	VITON	BLACK	1	
2	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Female/Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
	UNIT: mm	TITLE : Circular B Size Female / Male Lock Type Molded Cable Ass'y		
SCALE	1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N:	CBx-L4xxSN	DR. JAMES
REV.	SHEET	DWG.NO:	CBx-L4xxSN	CH. ERIC
A	1/1			AP.