



RECOMMENDED
PANEL CUT OUT

RoHS

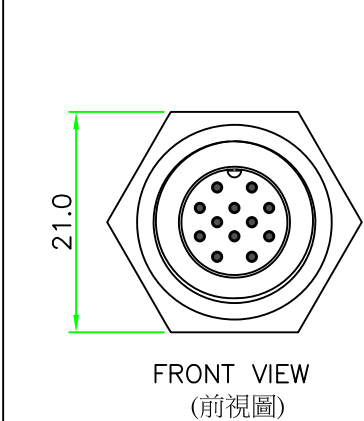


※PCB LAYOUT NEXT PAGE.

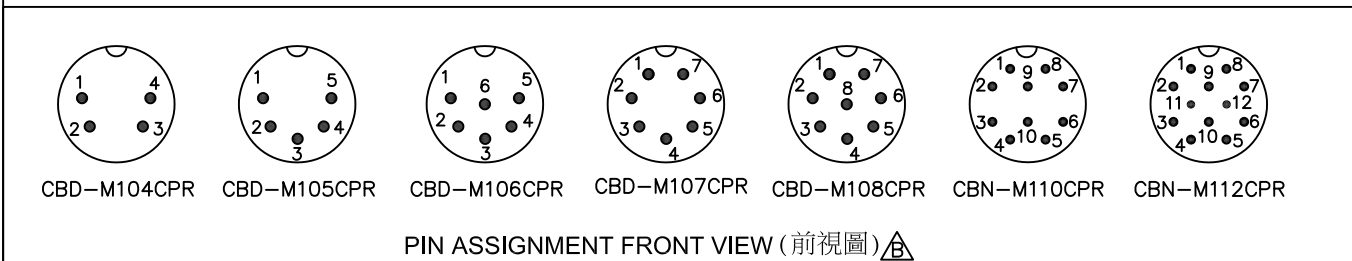

PIN ASSIGNMENT FRONT VIEW (前視圖)					
6	GLUE	Epoxy.	BLACK		
5	HOUSING	Metal Housing, BRASS, Nickel Plated.		1	
4	HEX NUT	BRASS, Nickel Plated.		1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	BRASS, 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	B Size Male Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

P/N No.	L	D
CBD	4.0	φ1.0
CBN	4.0	φ0.8

REV.	DESCRIPTION	DATE
A	ISSUE	May/27/2005
B	更正Pitch,料號變更,增加9~12pin規格	Nov/06/2020

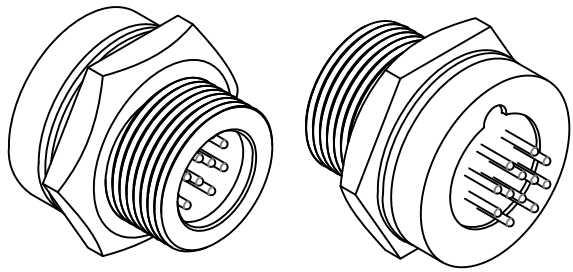

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 4.0mm
 - HOW TO ORDER: CBx-M1xxCPR
- 04 - 4 PIN 08 - 8 PIN
05 - 5 PIN 10 - 10 PIN
06 - 6 PIN 12 - 12 PIN
07 - 7 PIN
- D - CURRENT RATING 5A
N - CURRENT RATING 2A

原型號: CBD-M1xxCP

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : Circular B Size Male Connector Male Pin Rear Mount Screw Type Round Flange PCB Pin	
SCALE	1.5:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1°		P/N: CBx-M1xxCPR	DR. SIBYL
REV. B		DWG.NO: CBx-M1xxCPR	CH. JAMES
SHEET 1/2			AP.

