



RoHS 機密

REV.	DESCRIPTION	DATE
A	ISSUE (DI-11212012)	Jan/15/2024

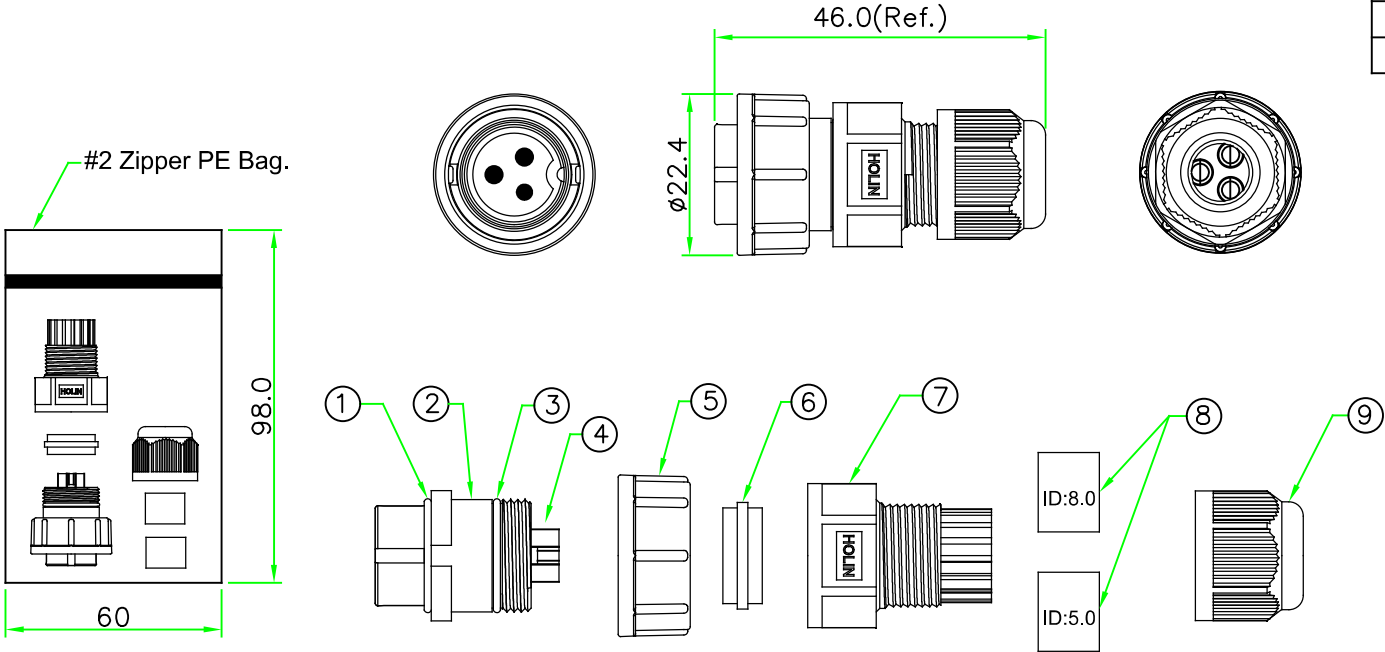

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE



CCG-L403SA
PIN ASSIGNMENT
FRONT VIEW
(前視圖)

9	CLAMP NUT	NYLON+GF.	BLACK	1	
8	TUBE	EPDM (ID= 5.0 & 8.0mm)	BLACK	2	
7	HOOD	NYLON.	BLACK	1	
6	GASKET	Santoprene.	BLACK	1	
5	LOCK NUT	NYLON+GF.	BLACK	1	
4	CONTACT	BRASS ,Male Pin. 6u"Gold Plated.		3	
3	O-RING	Silicon.	BLACK	1	0-1015-SK02
2	CONNECTOR	C Size Female Connector Insert, NYLON+GF.	BLACK	1	
	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular C Size Lock Type Female connector Male Pin Field Installable Plug	
SCALE	1:1		
UNLESS OTHERWISE SPECIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ±1°		P/N: CCG-L403SA	DR. Sibyl
REV. A	SHEET 1/1	DWG.NO: CCG-L403SA	CH. James
			AP.