



P/N No.	L
CCG	8.7
CCP	7.0
CCD	1.6
CCN	3.8

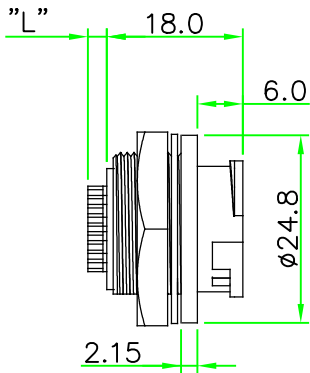


RoHS

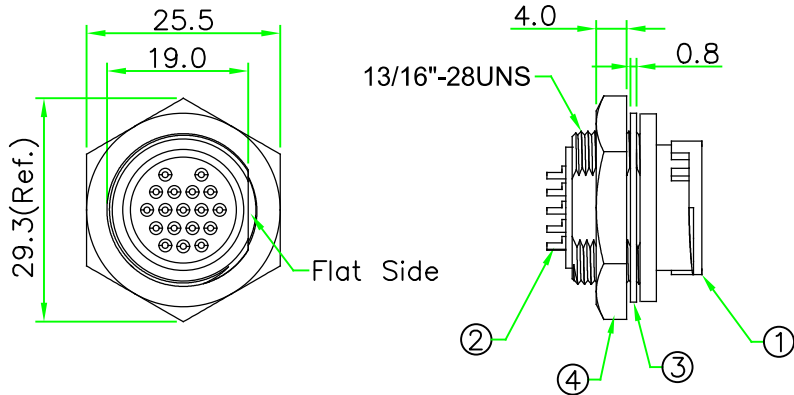

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/13/2024

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 4.0mm
 - HOW TO ORDER: CCx-L1xxCSF
- 02 - 2 PIN 09 - 09 PIN
03 - 3 PIN 10 - 10 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN 14 - 14 PIN
06 - 6 PIN 18 - 18 PIN
- G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

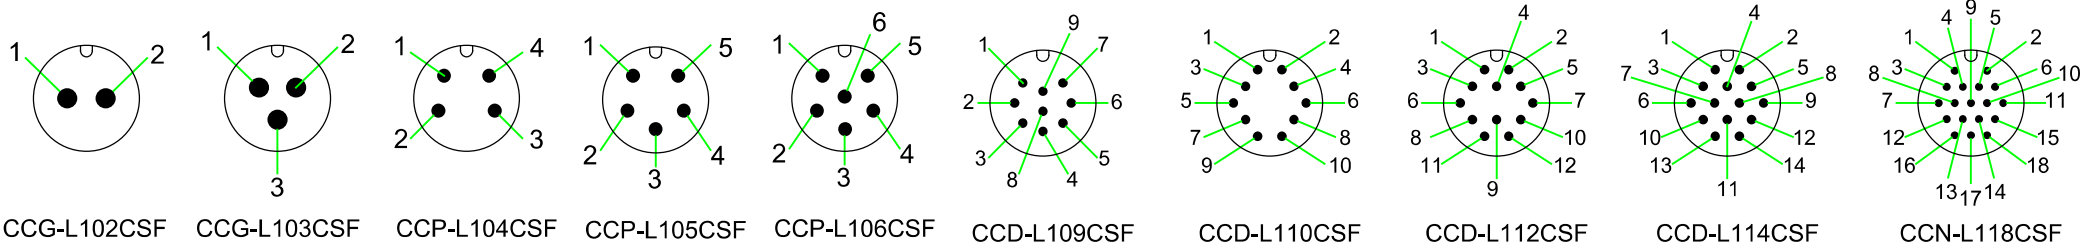

PIN ASSIGNMENT FRONT VIEW (前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE Circular C Size Male Connector Male Pin Front Mount Lock Type Round Flange Solder Bucket Pin	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: CCx-L1xxCSF	DR. SIBYL
REV. A	SHEET 1/1		CH. JAMES
		DWG.NO: CCx-L1xxCSF	AP.

4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	C Size Male Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS